

PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF FANNAL AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF FANNAL AND MUST BE RETURNED TO FANNAL UPON ITS REQUEST



SPEC. NUMBER AM-0700022A	PRODUCT GROUP TFT- LCM	REV. A	ISSUE DATE 2021-05-21	PAGE 1 OF 26
-----------------------------	---------------------------	-----------	--------------------------	-----------------

FN0700D022A

Product Specification Rev.V0

BUYER	
SUPPLIER	FANNAL Electronics CO., LTD
FG-Code	FN0700D022A

ITEM	BUYER SIGNATURE	DATE
_____	_____	_____
_____	_____	_____
_____	_____	_____

ITEM	SUPPLIER SIGNATURE	DATE
Prepared	_____	_____
Reviewed	_____	_____
Approved	_____	_____

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

A

2021-05-21

SPEC. NUMBER
AM-0700022A

SPEC . TITLE
FN0700D022A Product Specification

PAGE
2 OF 26

REVISION HISTORY

REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
A		Initial Release	2021.5.20	

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

A

2021-05-21

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700022A

FN0700D022A Product Specification

3 OF 26

Contents

No.	Items	Page
1.0	General Description	4
2.0	Mechanical Drawing	5
3.0	Absolute Maximum Ratings	7
4.0	Electrical Specifications	8
5.0	Interface Description	10
6.0	Optical specifications	16
7.0	Reliability Test	18
8.0	Precautions	19
9.0	Packing Information	23
10.0	Visual Inspection Criteria For All Customers	24

1.0 General Description /一般说明

1.1 Application /应用


- Automotive.

1.2 General Specification /通用技术条件

The followings are general specifications at the FN0700D022A.


<Table 1. LCD Module Specifications>


Parameter	Specification	Unit	Remarks
LCD size	7.0inch(Diagonal)		
Number Of Pixels	800(H)×480(V)	pixels	
Pixel Pitch	0.0635(H)×RGB×0.1905(V)	mm	
Active Area	152.4(H)×91.44(V)	mm	
Viewing Area	154.7×94.0	mm	
Display Mode	Normally Black		
Module Size	166.10(W)×106.00(H)×9.8(D)/20MAX	mm	
With/Without TP	Without CTP		
Interface	RGB 24Bit		
Backlight Consumption	3.6	W	
Weight	TBD	g	
Luminance	1000	cd/m ²	
Driver IC	/		

PRODUCT GROUP	REV	ISSUE DATE	
TFT - LCM PRODUCT	A	2021-05-21	
SPEC. NUMBER AM-0700022A	SPEC. TITLE FN0700D022A Product Specification		

2.0 Mechanical Drawing /机械制图



LCM Drawing
Drawing Attachment: Front

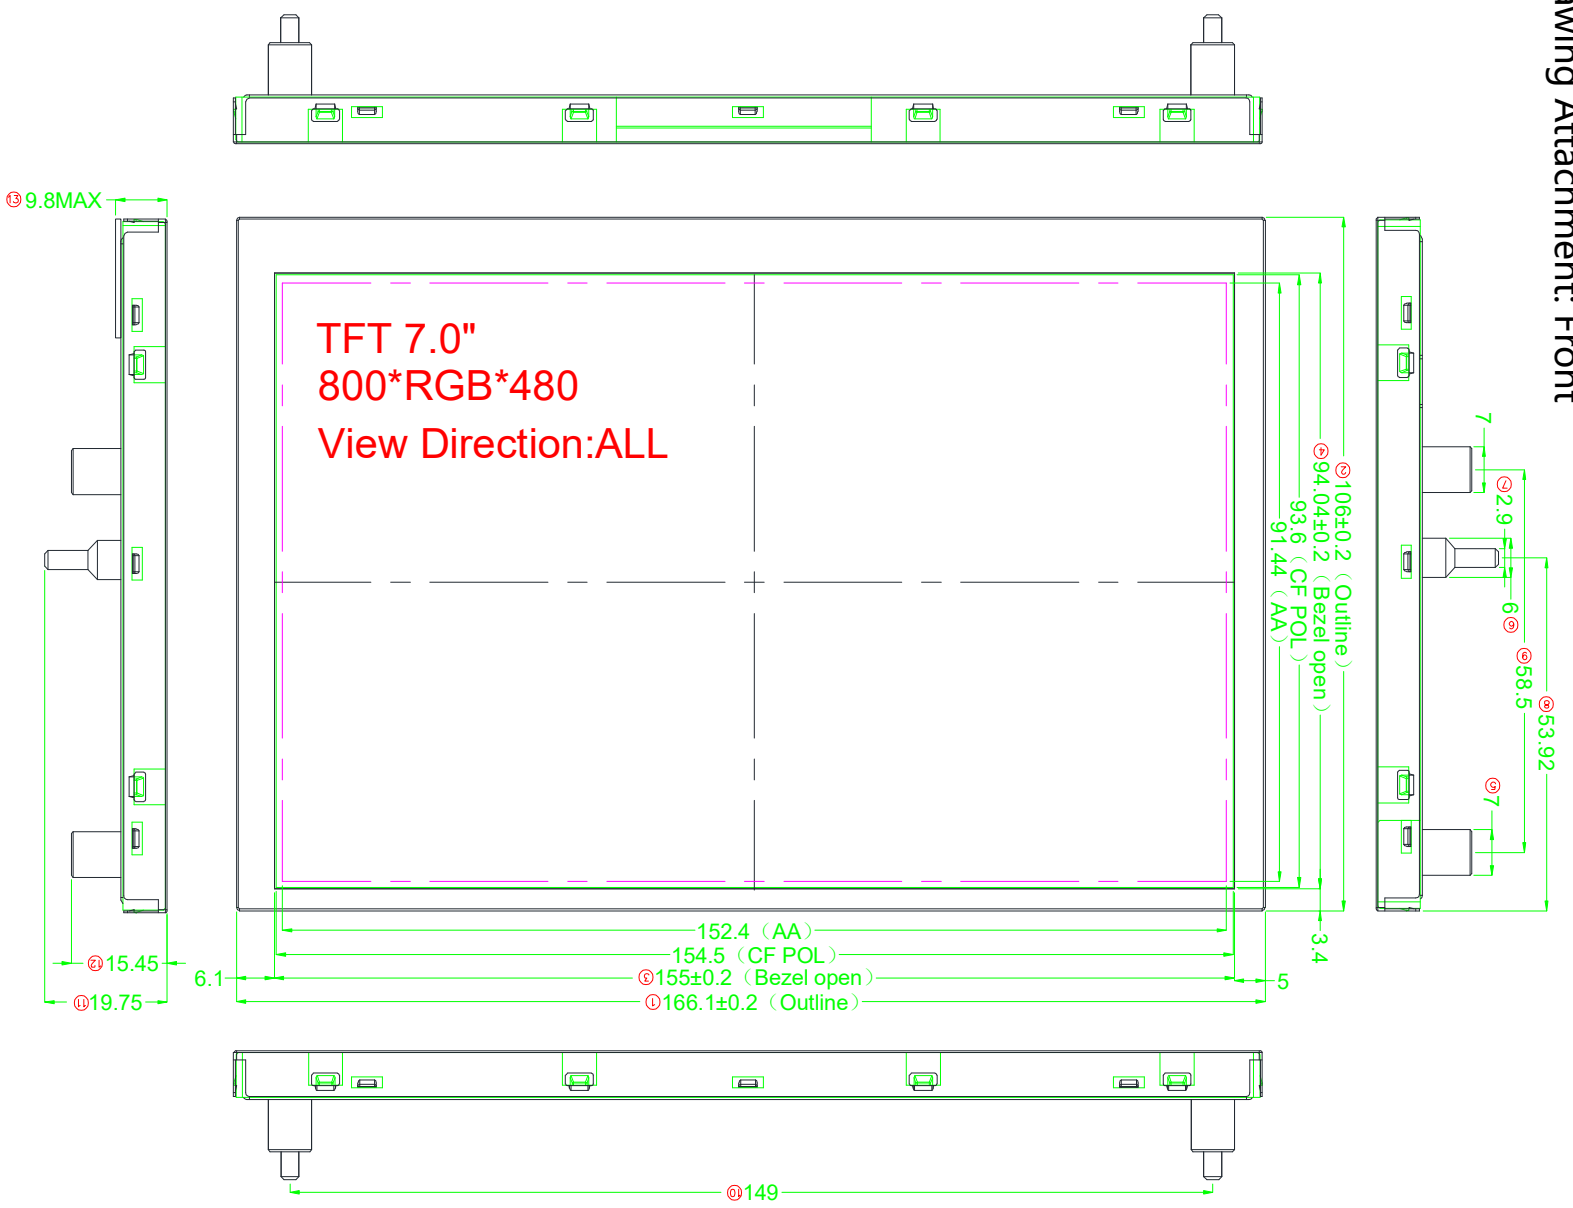

PRODUCT GROUP	REV	ISSUE DATE	
TFT - LCM PRODUCT	A	2021-05-21	
SPEC. NUMBER	SPEC. TITLE		

AM-0700022A	FN0700D022A Product Specification	6 OF 26
-------------	-----------------------------------	---------

LCM Drawing
Drawing Attachment: Back

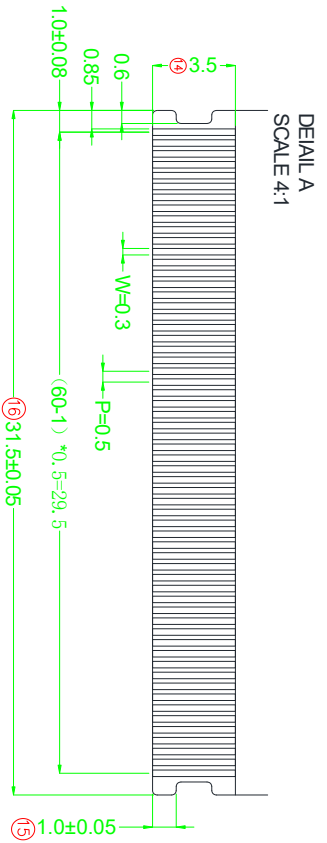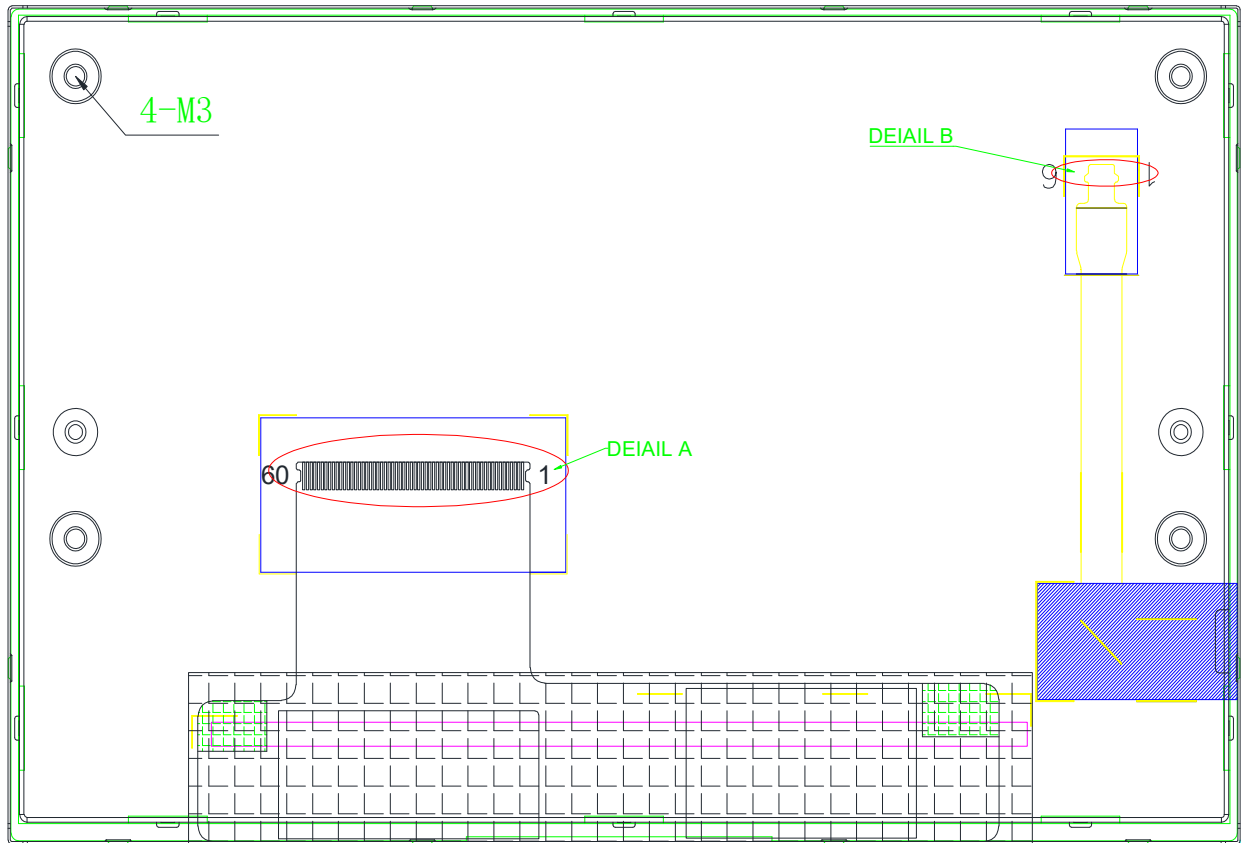

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

A

2021-05-21

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700022A

FN0700D022A Product Specification

7 OF 26

3.0 ABSOLUTE MAXIMUM RATINGS /绝对最大额定值

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit.

< Table 2. Environment Absolute Maximum Ratings >

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Voltage	VDD	-0.5	5.0	V	
Operating Temperature	T _{OP}	-30	+85	°C	
Storage Temperature	T _{ST}	-40	+90	°C	
Humidity	RH	--	90%(Max60 °C)	RH	

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

A

2021-05-21

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700022A

FN0700D022A Product Specification

8 OF 26

4.0 ELECTRICAL SPECIFICATIONS/电气规范

4.1 TFT LCM Module

< Table 3. LCD Module Electrical specifications > [Ta =25±2 °C]

Parameter	Symbol	Values			Unit	Notes
		Min.	Typ.	Max.		
Power Supply Voltage	VDD	3.01	3.3	3.6	V	
Input logic high voltage	VIH	0.7DVDD	-	DVDD	V	
Input logic low voltage	VIL	GND	-	0.3DVDD	V	

4.2 Backlight Driving Conditions /背光驱动条件


< Table 4. LED Driving guideline specifications >

[Ta =25±2 °C]

Parameter	Symbol	Values			Unit	Notes
		Min.	Typ.	Max.		
LED Power supply Input voltage	VLED	14	15	17	V	Note 1
Power supply current for Back light	ILED	-	-	240	mA	-
LED Life Time	--	--	50000	--	Hrs	Note 2

Note1: Under LCM operating, the stable forward current should be inputted. And forward voltage is for reference only.

Note2: Optical performance should be evaluated at Ta=25°C. if LED is driven by high current, high ambient temperature & Humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

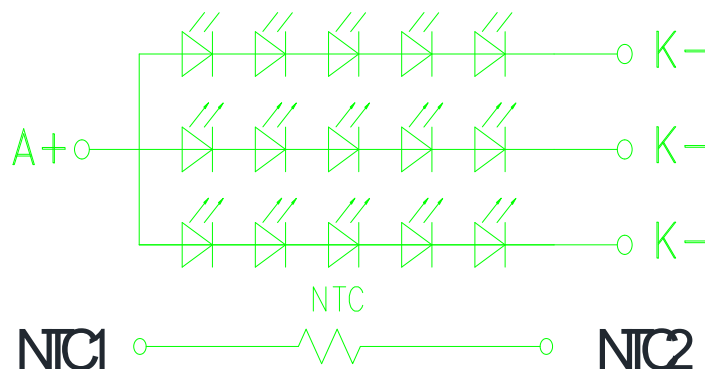

5.0 Interface Description/接口说明

FPC Connector is used for the module electronics interface. The recommended model is FH12A-50S-0.5SH manufactured by Hirose.

5.1 Pin assignment for LCM module /模组引脚分配

< Table5. Pin Assignment for LCD Module Connector >

Pin No.	Symbol	I/O	Description	Remark
1	GND	P	Power Ground	
2	NC	-	Keep floating	
3	VDD	P	External main and I/O power supply ;Power 3.3V	
4	R0	I	Red Data (LSB)	
5	R1	I	Red Data	
6	R2	I	Red Data	
7	R3	I	Red Data	
8	R4	I	Red Data	
9	R5	I	Red Data	
10	R6	I	Red Data	
11	R7	I	Red Data (MSB)	
12	G0	I	Green Data (LSB)	
13	G1	I	Green Data	
14	G2	I	Green Data	
15	G3	I	Green Data	
16	G4	I	Green Data	
17	G5	I	Green Data	
18	G6	I	Green Data	
19	G7	I	Green Data (MSB)	
20	B0	I	Blue Data (LSB)	
21	B1	I	Blue Data	
22	B2	I	Blue Data	

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

A

2021-05-21

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700022A

FN0700D022A Product Specification

11 OF 26

Pin No.	Symbol	I/O	Description	Remark
23	B3	I	Blue Data	
24	B4	I	Blue Data	
25	B5	I	Blue Data	
26	B6	I	Blue Data	
27	B7	I	Blue Data (MSB)	
28	DCLK	I	Clock signal	
29	DE	I	Data Enable	
30	VDD	P	External main and I/O power supply ; Power 3.3V	
31	VDD	P	External main and I/O power supply ; Power 3.3V	
32	NC	-	Keep floating	
33	RESET	I	Global reset pin (Default high), active low.	
34	STBYB	I	Standby mode setting pin (Default high), active low.	
35	SHLR	I	Horizontal scan direction (Default high),	Note (1)
36	VDD	P	External main and I/O power supply ; Power 3.3V	
37	UPDN	I	Vertical scan direction (Default high),	Note (1)
38	GND	P	Power Ground	
39	GND	P	Power Ground	
40	NC	-	Keep floating	
41	NC	-	Keep floating	
42	NC	-	Keep floating	
43	NC	-	Keep floating	
44	NC	-	Keep floating	
45	NC	-	Keep floating	
46	NC	-	Keep floating	

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

A

2021-05-21

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700022A

FN0700D022A Product Specification

12 OF 26

Pin No.	Symbol	I/O	Description	Remark
47	NC	-	Keep floating	
48	NC	-	Keep floating	
49	VDD	P	External main and I/O power supply ; Power 3.3V	
50	NC	-	Keep floating	
51	GND	P	Power Ground	
52	GND	P	Power Ground	
53	GND	P	Power Ground	
54	VDD	P	External main and I/O power supply ; Power 3.3V	
55	NC	-	Keep floating	
56	NC	-	Keep floating	
57	VDD	P	External main and I/O power supply ; Power 3.3V	
58	NC	-	Keep floating	
59	GND	P	Power Ground	
60	NC	-	Keep floating	


Note (1)

SHLR	UPDN	Data shifting
VDD	VDD	Left → Right, UP → Down(default)
VDD	GND	Left → Right, Down → UP
GND	VDD	Right → Left, UP → Down
GND	GND	Right → Left, Down → UP


5.2 Power ON/OFF Timing sequence/电源开关时序

The recommended power on sequence should be: VDD RESET STBYB. To power off reverse this sequence, or tum of al signals and power simultaneously.

Power on :

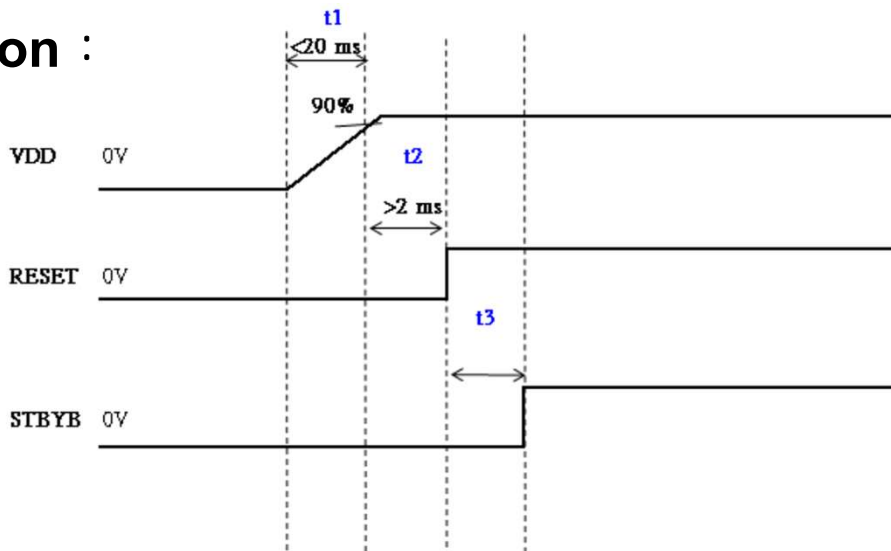


Power off :

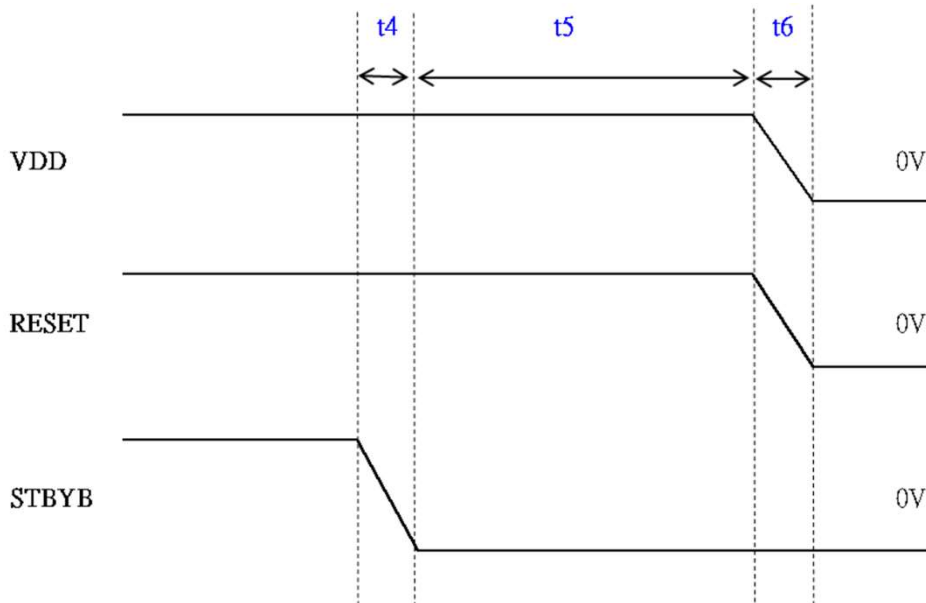

Symbol	SPEC.			Unit
	Min.	Typ.	Max.	
t1	0	5	20	ms
t2	2	3	5	ms
t3	0	5	10	ms
t4	0	2	5	ms
t5	8	9	10	frame
t6	0	2	5	ms

5.3 Data Input Format for TTL

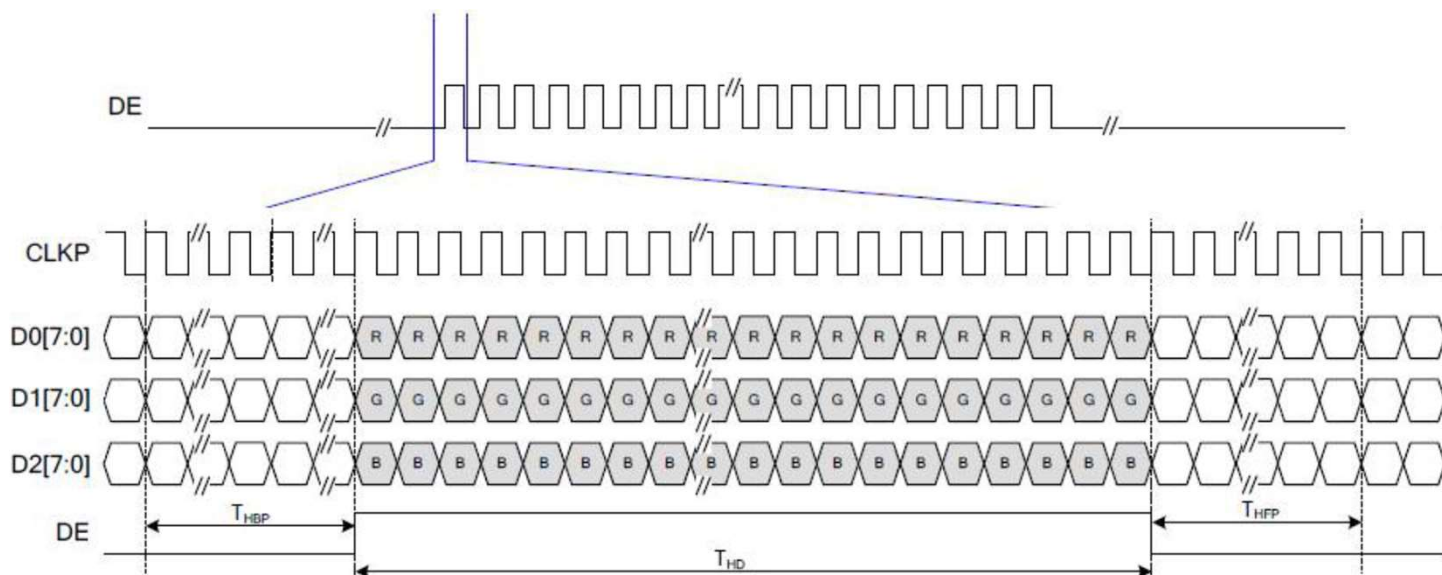

5.4 Input Timing

Only DE mode for 800x480

Parameter	Symbol	Min.	Typ.	Max.	Unit
CLK frequency	F_{CLK}	25.2	25.4	35.7	MHz
Horizontal display area	T_{HD}		800		CLK
HS period time	T_H	860	864	974	CLK
HS blanking	$T_{HFP} + T_{HBP}$	60	64	174	CLK
Vertical display area	T_{VD}		480		H
VS period time	T_V	488	490	611	H
VS blanking	$T_{VBP} + T_{VFP}$	8	10	131	H

5.5 DC Electrical Characteristics

TTL Interface DC Characteristic;

(VDD=3.0V TO 3.6V,GND=0V,Ta= +25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
High Level Input Voltage	V_{IH}	0.7xVDD	-	VDD	V	
Low Level Input Voltage	V_{IL}	GND	-	0.3xVDD	V	
High Level Output Voltage	V_{OH}	VDD-0.4	-	VDD	V	VDD=3.3V @Ioh= 1mA
Low Level Output Voltage	V_{OL}	GND	-	GND+0.4	V	VDD=3.3V @Iol= -1mA
Pull-high/low Impedance	R_{PULL}	100	250	500	Kohm	VDD=3.3V, Ta =+25°C


5.6 AC Electrical Characteristics

Basic Input AC Characteristic;


VDD=3.0V to 3.6V, GND=0V, Ta=+25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
VDD power source slew time	T _{POR}	-	-	20	ms	From 0V to 90% VDD
GRB active pulse width	T _{GRB}	1	-	-	ms	VDD = 3.3V
Power on reset voltage	V _{POR}	0	-	100	mV	

Basic AC Timing Chart

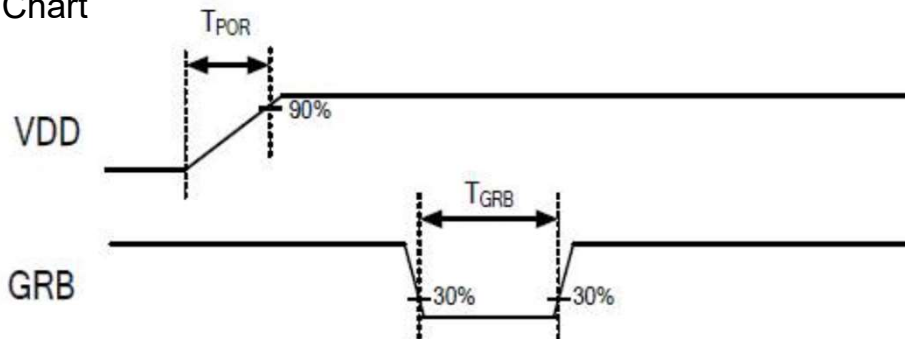


Power On Reset Chart

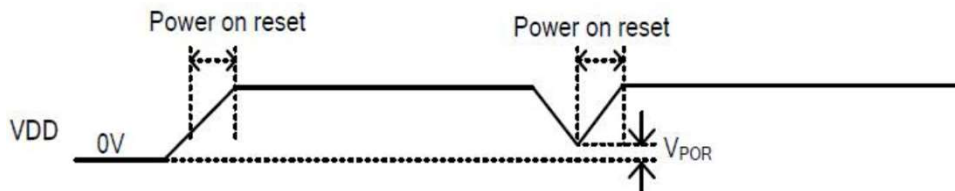

TTL-DE Interface AC Characteristic :

(VDD= 3.0V to 3.6V, GND= 0V, Ta= +25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Clock Frequency	F _{CLK}	5	-	55	MHZ	T _{CLK} = 1/F _{CLK}
CLK pulse width	T _{CW}	30% (*)	-	70%	T _{CLK}	(*) Over than 0.5/(F _{CLK}) _{max} .
Data setup time	T _{DSU}	6	-	-	ns	
Data hold time	T _{DHD}	6	-	-	ns	
DE setup time	T _{ESU}	6	-	-	ns	

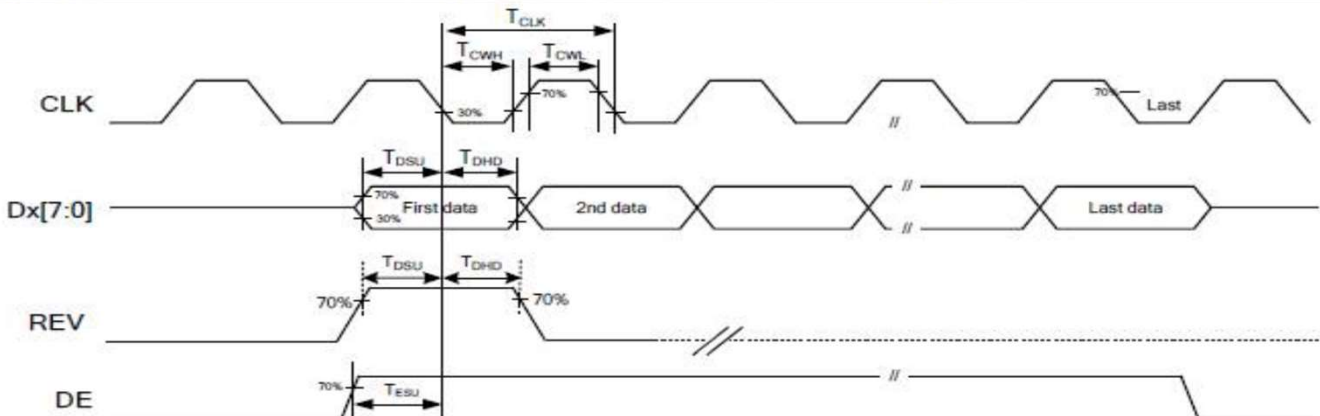

6.0 OPTICAL SPECIFICATIONS /光学规格

6.1 Overview /概述

The test of optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta=0$ ($=\theta_3$) as the 3 o' clock direction (the "right"), $\theta=90$ ($=\theta_{12}$) as the 12 O' clock direction ("upward"), $\theta=180$ ($=\theta_9$) as the 9 O' clock direction ("left") and $\theta=270$ ($=\theta_6$) as the 6 O' clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed.

6.2 Optical Specifications /光学规格

< Table8. Optical Table >

Item	Symbol	Condition	Min	Typ.	Max	Unit	Note
Viewing Angle	θ_L	$Cr \geq 10$	80	--	--	deg	Note 1
	θ_R		80	--	--		
	ψ_T		80	--	--		
	ψ_B		80	--	--		
Contrast Ratio	Cr	$\theta=0^\circ$	800	1000		-	Note 2
Response Time	$Tr+Tf$	$FF=0^\circ$	--	25	35	ms	Note 3
Color Coordinate of CIE1931	Rx	$\theta=0^\circ$	0.621	0.661	0.701	-	Note 4
	Ry		0.287	0.327	0.367		
	Gx		0.242	0.282	0.322		
	Gy		0.536	0.576	0.616		
	Bx		0.094	0.134	0.174		
	By		0.065	0.105	0.145		
	Wx		0.272	0.312	0.352		
	Wy		0.327	0.267	0.407		
NTSC Ratio	NTSC	CIE1931	--	68	--	%	Note 5
Luminance	L		--	1000	--	cd/m ²	

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

A

2021-05-21

SPEC. NUMBER

SPEC. TITLE

PAGE


AM-0700022A

FN0700D022A Product Specification

17 OF 26

Note 1: The definition of Viewing Angle

Refer to the graph below marked by θ and ϕ .

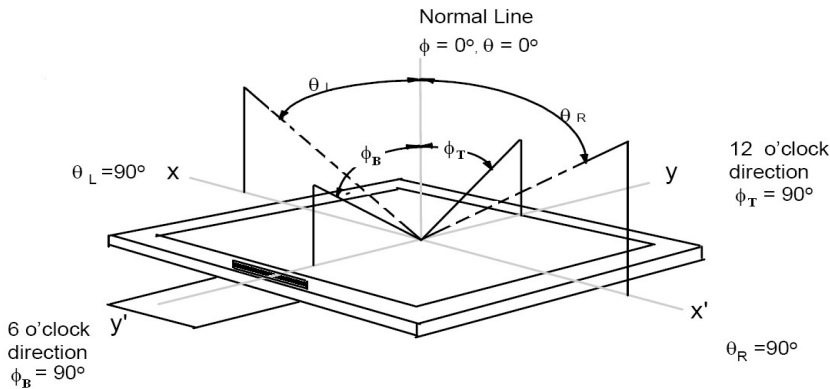

Note 2: The definition of Contrast Ratio

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance When LCD is at "White" state}}{\text{Luminance When LCD is at "Black" state}}$$

(Contrast Ratio is measured in optimum common electrode voltage)

Note 3: Definition of Response time. (Test LCD using RD80S or similar equipments):

The output sign also photo detector are measured when the input sign also are changed from "black" to "white" (Voltage falling time) and from "white" to "black" (Voltage rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figures below.

Note 4: Color Coordinates of CIE 1931


The test condition is at ILED=20mA and measured on the surface of LCD module at 25°C.

Measurement equipment: CS2000 or similar equipments


The Color Coordinate (CIE 1931) is the measurement of the center of the display shown in below figure.

Note 5: Definition of Color of CIE Coordinate and NTSC Ratio.

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

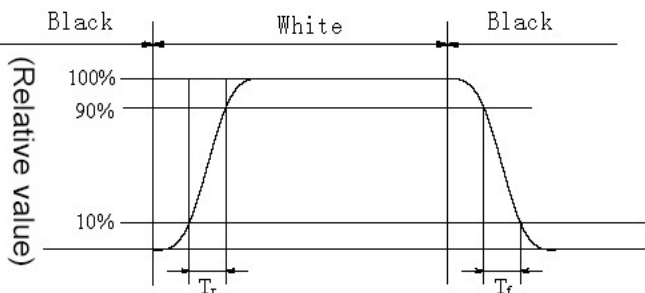

Note 3

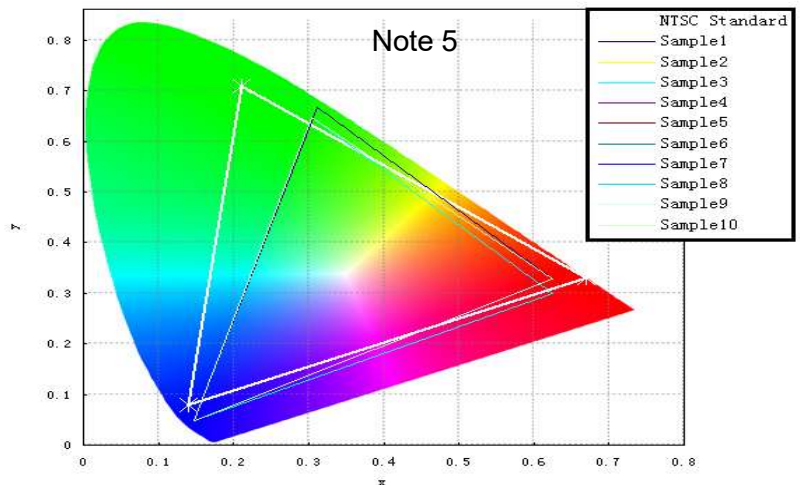

Note 6: Gamma curve control

For gamma curve control, 'HUAWEI' S request as below:


1, the whole curve's tolerance must control within ± 0.3 , HUAWEI will test the gray scale below: 0, 8, 16, 25, 34, 49, 58, 66, 74, 82, 90, 99, 107, 115, 123, 132, 140, 148, 156, 165, 173, 181, 189, 197, 206, 214, 222, 230, 239, 247, 255

7.0 RELIABILITY TEST /可靠性测试

The Reliability test items and its conditions are shown in below.

<Table 9. Reliability Test Parameters >

No	Test Items	Conditions
1	High temperature storage test	90°C 500hr
2	Low temperature storage test	-40°C 500hr
3	Low temperature operation test	-30°C 500hr
4	High temperature operation test	85°C 500hr
5	High temperature & high humidity (operation test)	60°C 90%RH 500hr
6	Thermal Shock Test	-40°C~90°C 1hr/cycle 100cycle
7	Vibration Test	10Hz-150Hz 100m/s ² 120min
8	Mechanical shock	100G ±X, ±Y, ±Z, 3times for each direction
9	Packing Vibration test	0.015G ² /Hz from 50-200Hz. 6dB/Octave from 200-500Hz 2hours for each direction of X,Y,Z
10	Dropping test	Drop to the ground form 0.5m height, one time, every side of carton.(Packing condition)
11	ESD test	Voltage:±10KV R:330Ω C: 150pF Air discharge, 10time


PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	A	2021-05-21	
SPEC. NUMBER AM-0700022A	SPEC. TITLE FN0700D022A Product Specification		PAGE 19 OF 26

- **8.0 Precautions /注意事项**

- Please pay attention to the followings when you use this TFT LCD Panel.

- **8.1 Mounting Precautions /安装注意事项**

- (1) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (2) You must mount a module using specified mounting holes (Details refer to the drawings).
- (3) Please make sure to avoid external forces applied to the Source PCB or FPC and D-IC during the process of handling or assembling. If not, It causes panel damage or malfunction.
- (4) Note that polarizers are very fragile and could be easily damaged. Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
- (5) Do not pull or fold the source D-IC which connect the source PCB or FPC and the panel.
- Do not pull or fold the LED wire.
- (6) After removing the protective film, when the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with alcohol or purified water.
- Do not strong polar solvent because they cause chemical damage to the polarizer.
- (7) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (8) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (9) Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass may be broken.
- (10) Do not disassemble the module.
- (11) To determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- (12) If the customer's set presses the main parts of the LCD, the LCD may show the abnormal display. But this phenomenon does not mean the malfunction of the LCD and should be pressed by the way of mutual agreement.
- (13) Do not drop water or any chemicals onto the LCD's surface.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	A	2021-05-21	
SPEC. NUMBER AM-0700022A	SPEC. TITLE FN0700D022A Product Specification		PAGE 20 OF 26


8.2 Operating Precautions /操作注意事项

- (1) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (2) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (3) The electrochemical reaction caused by DC voltage will lead to LCD degradation, so DC drive should be avoided.
- (4) The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.
- (5) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.
- (6) Design the length of cable to connect between the connector for back-light and the converter as short as possible and the shorter cable shall be connected directly.
The longer cable between that of back-light and that of converter may cause the luminance of LED to lower and need a higher startup voltage(Vs).
- (7) Connectors are precise devices for connecting PCB and transmitting electrical signals. Operators should insert and unplug MDL in parallel when assembling MDL.
- (8) Do not connect or disconnect the cable to/ from the module at the "Power On" condition.
- (9) When the module is operating, do not lose CLK, ENAB signals. If any one these signals is lost, the LCD panel would be damaged.
- (10) Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (11) Do not re-adjust variable resistor or switch etc.
- (12) For the Q/Single/OC Product, If the LED designed side view, LED bar should be putted in the Long/short side ; Otherwise, its reliability and function may not be guaranteed.

注：
 ①(1)涉及到Pol相关条目适用于OC/MDL出货产品，
 ②(6)(7)涉及到connector相关适用于OC/MDL出货产品
 ③ (12) 涉及到客户进行BLU设计， LED Bar位置需要避开GOA位置；

8.3 Electrostatic Discharge Control /静电放电控制

- (1) Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly. Keep products as far away from static electricity as possible.
- (2) Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		A	2021-05-21	
SPEC. NUMBER	SPEC. TITLE			PAGE
AM-0700022A	FN0700D022A Product Specification			21 OF 26


8.4 Precautions for Strong Light Exposure / 强光照射注意事项

It is not allowed to store or run directly in strong light or in high temperature and humidity for a long time; Strong light exposure causes degradation of polarizer and color filter.

8.5 Storage Precautions / 存储注意事项

When storing modules as spares for a long time, the following precautions are necessary.

- (1) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.
Temperature : 5 ~ 40 °C
- (2) Humidity : 35 ~ 75 %RH
- (3) Period : 6 months
- (4) Control of ventilation and temperature is necessary.
- (5) Please make sure to protect the product from strong light exposure, water or moisture.
Be careful for condensation.
- (6) Store in a polyethylene bag with sealed so as not to enter fresh air outside in it.
- (7) Do not store the LCD near organic solvents or corrosive gasses.
- (8) Please keep the Modules/OC/FOG at a circumstance shown below Fig.

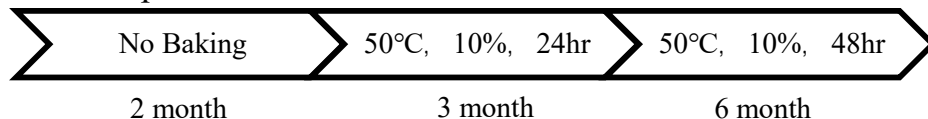


8.6 Precautions for Protection Film / 保护膜注意事项

- (1) Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- (2) In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

8.7 Appropriate Condition for Display / 适当的显示条件

- (1) Normal operating condition
 - Temperature: 0 ~ 40°C
 - Operating Ambient Humidity : 10 ~ 90 %
 - Display pattern: dynamic pattern (Real display)
 - Suitable operating time: under 12 hours a day.
- (2) Special operating condition
If the product will be used in extreme conditions such as high temperature, humidity, display patterns or 7*24hrs operation time etc., It is strongly recommended to contact BOE for Application engineering a dvice. Otherwise, its reliability and function may not be guaranteed.
- (3) Black image or moving image is strongly recommended as a screen save.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	A	2021-05-21	
SPEC. NUMBER	SPEC. TITLE		PAGE
AM-0700022A	FN0700D022A Product Specification		22 OF 26

- (4) Lifetime in this spec. is guaranteed only when commercial display is used according to operating usages.
- (5) Please contact BOE in advance when you display the same pattern for a long time.
- (6) If the Module keeps displaying the same pattern for a long period of time, the image may be “sticked“ or “turn off” to the screen. To avoid image sticking, it is recommended to use a screen saver.
- (7) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.
- (8) Dew drop atmosphere should be avoided.
- (9) The storage room should be equipped with a good ventilation facility and avoid to expose to corrosive gas , which has a temperature controlling system.
- (10) The LCD should be avoided to expose to corrosive gas for long time, ,the LCD may be affected by the gas as SO₂ ,H₂S etc.
- (11) When expose to drastic fluctuation of temperature (hot to cold or cold to hot) ,the LCD may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.
- (12) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation

8.8 Others /其他

A. LC Leak /液晶泄露

- If the liquid crystal material leaks from the panel, it is recommended to wash the LC with acetone or ethanol and then burn it.
- In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- If LC in mouth, mouth need to be washed, drink plenty of water to induce vomiting and follow medical advice.
- If LC touch eyes, eyes need to be washed with running water at least 15 minutes.

B. Rework /返工

- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

- C. In order to prevent potential problems, flicker should be adjusted by optimizing the Vcom value in customer LCM Line (适用于Q/Single/OC出货产品)

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

A

2021-05-21

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700022A

FN0700D022A Product Specification

23 OF 26

9.0 PACKING INFORMATION(产品形态: LCM)

TBD

10.0 VISUAL INSPECTION CRITERIA FOR ALL CUSTOMERS /所有客户的目视检查标准

10.1 Sampling Method /抽样方法

Unless otherwise agreed upon in writing, the sampling inspection shall be applied to the Customers incoming inspection.

- 10.1.1 Lot size : 1 pallet per same model
- 10.1.2 Sampling type : Random sampling
- 10.1.3 Inspection level : II
- 10.1.4 Sampling table : MIL-STD-105E

10.2 Inspection Environment /检验环境

10.2.1 Ambient conditions

- a. Ambient Temperature: $25 \pm 3^{\circ}\text{C}$
- b. Relative Humidity: $65 \pm 20\% \text{RH}$
- c. Ambient Illumination: 300-700LUX (Normal: 500LUX)

10.2.2 Viewing Distance

The distance between the LCM and the inspector's eyes shall be at least 30cm-50cm

10.2.3 Viewing Angle


performing in front of the panel

[Vertical] : $\pm 25^{\circ}$

[Horizontal] : $\pm 40^{\circ}$

10.2.4 Inspection Area:

Display Area (Active Area)

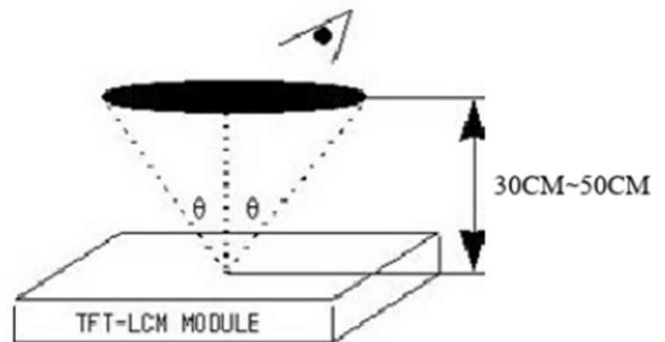

10.3 Definitions /定义

10.3.1 Dark / Bright Spots

Points on display which appear dark/bright and usually result from the contamination.

These defects do not vary in size or intensity (contrast) when contrast is varied.

10.3.2 Dark / Bright Lines

Lines on display which appear dark/bright and usually result from the contamination.

10.3.3 Polarizer Scratch


Lines on display which are seen across a darker background and do not vary in size.

10.3.4 Polarizer Dent

White spots on display which appear against a darker background and do not vary in size.

10.3.5 Bright Dot Defects

Dots (sub-pixels) on display which appear bright in the display area and visible through the 5%ND filter at Black Pattern.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	A	2021-05-21	
SPEC. NUMBER AM-0700022A	SPEC. TITLE FN0700D022A Product Specification		PAGE 25 OF 26

10.3.6 Dark Dot Defects

Dots(sub-pixels)on display which appear dark in the display area at R.G.B Color Pattern.

10.3.7 Line Defects

All line defects on display which appear bright/dark such as vertical, horizontal, or cross lines.

10.3.8 Mura

Mura on display which appears darker/brighter against background brightness on parts of display area.

10.3.9 BM Defects

Bright(white)Points on display which are off BM(Black Matrix).

10.3.10 Visual Inspection

Inspection for LCM when the unit turns on.

10.3.11 Appearance Inspection

External inspection for LCM when the unit turns off.

10.3.12 Other

Defects which cannot be classified into the above defect definitions.

Note 1: Bright& Dark dots are not smaller than a sub-pixel(Dots smaller than a sub-pixel are not counted as defect dots)

10.4 Inspection Criteria

Refer to 《TFT LCM general inspection standard》

10.5 Verification

The supplier can verify the defective LCMs to segregate the responsibilities at customer's facility or can request the Customer to ship the defective LCMs to assigned place for verification


This verification result shall be agreed mutually by the Customer and Supplier. This result can be corrected/changed after detail failure analysis at Supplier's facilities.

10.6 Supplier Induced Defects

All of the Supplier induced defective LCMs shall be returned to the Supplier for repair or replacement.

Before return the defective LCMs, the Customer needs Supplier's confirmation with RMA Number.

All of the returned LCMs shall be returned to the Customer within agreed time period.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	A	2021-05-21	
SPEC. NUMBER AM-0700022A	SPEC. TITLE FN0700D022A Product Specification		PAGE 26 OF 26

10.7 Customer Induced Defects /顾客引起的缺陷

The Customer can return the customer induced defective LCMs to the Supplier for repair. The repair cost for Customer induced defective LCMs shall be agreed with both parties, Customer and Supplier.

10.8 Warranty Period /质量保证期

In-warranty period is Eighteen(18)Months from manufacturing month of LCM

Note :

- a. Eighteen months are composed of twelfth months in-warranty period and sixth months distribution period
- b. The manufacturing Month is on the LCMs as Supplier's serial No.

10.9 Repair Warranty /维修保证书

Repair warranty is Twelve(12)Months from repaired month for repaired LCMs

Note : a. The Label for repair will be added after repairing.

10.10 Warranty avoidance /避免担保

The warranty will be avoided in cases of below:

- a. When the warranty period is expired.
- b. The Customer induced defective LCMs.
- c. When the LCMs were repaired by 3rd party without Supplier's approval.
- d. When the LCMs were treated like Disassemble and Rework by the Customer and/or Customer's representatives without Supplier's approval.

10.11 Others /其他

If any problems arise with the LCMs supplied by supplier, the customer and supplier will cooperate and make efforts to solve it with mutual confidence and respect