

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF FANNAL AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF FANNAL AND MUST BE RETURNED TO FANNAL UPON ITS REQUEST



SPEC. NUMBER  
AM-0700054B

PRODUCT GROUP  
TFT- LCM

REV.  
V1

ISSUE DATE  
2022-10-26

PAGE  
1 OF 27

**FN0700D054B**

**Product Specification Rev.V1**


BUYER	
SUPPLIER	FANNAL Electronics CO., LTD
FG-Code	FN0700D054B

Preliminary Specification

Approval Specification

ITEM	BUYER SIGNATURE	DATE
_____	_____	_____
_____	_____	_____
_____	_____	_____

ITEM	SUPPLIER SIGNATURE	DATE
Prepared	LAI	2022-10-26
Reviewed	DONG	2022-10-26
Approved	JACK	2022-10-26

<b>PRODUCT GROUP</b>	REV	ISSUE DATE	
TFT- LCM PRODUCT	V1	2022-10-26	

SPEC. NUMBER AM-0700054B	SPEC . TITLE FN0700D054B Product Specification	PAGE 2 OF 27
-----------------------------	---	-----------------

## REVISION HISTORY

REV.	Page.	DESCRIPTION OF CHANGES	DATE	PREPARED
V0		Initial Release	2022-6-27	
V1		Update Color Coordinate data	2022-10-26	JACK

**PRODUCT GROUP**

**REV**

**ISSUE DATE**



TFT- LCM PRODUCT

V1

2022-10-26

**SPEC. NUMBER**

AM-0700054B

**SPEC. TITLE**

FN0700D054B Product Specification

**PAGE**

3 OF 27

## Contents

<b>No.</b>	<b>Items</b>	<b>Page</b>
1.0	General Description	4
2.0	Mechanical Drawing	5
3.0	Absolute Maximum Ratings	6
4.0	Electrical Specifications	7
5.0	Interface Description	9
6.0	Optical Specifications	17
7.0	Reliability Test	19
8.0	Precautions	20
9.0	Packing Information	24
10.0	Visual Inspection Criteria For All Customers	25

**PRODUCT GROUP**

REV

ISSUE DATE



TFT- LCM PRODUCT

V1

2022-10-26

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700054B

FN0700D054B Product Specification

4 OF 27

**1.0 General Description /一般说明****1.1 Application /应用**

- Industrial
- Automotive
- Medical
- Outdoor highlight

**1.2 General Specification /通用技术条件**

The followings are general specifications at the FN0700D054B

Parameter	Specification	Unit
LCD size	7.0 inch(Diagonal)	
Number Of Pixels	800(H)×480(V)	pixels
Pixel Pitch	0.0642(H)×RGB×0.1790(V)	mm
Active Area	154.08(H)×85.92(V)	mm
Pixel Arrangement	Pixels RGB stripe arrangement	
Display Mode	Normally White	
Module Size	165(W)×100(H)×5.65(D)	mm
Display Colors	16.7M(6bit +Hi-FRC)	colors
Interface	RGB	
Power Consumption	1.5	W
Weight	150	g
Luminance	250(Typ.)	cd/m <sup>2</sup>
Driver IC	EK9713 / NT39419 EK73002 / NT52001	

# 2.0 Mechanical Drawing /机械制图

	1	2	3	4	5	6	7	8	9																																																																																																																																																																																																																						
A	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2">TECHNOLOGY CHARACTERISTICS LCM</th> </tr> <tr> <td>尺寸 SIZE</td> <td>7.0 inch</td> </tr> <tr> <td>分辨率 Resolution ratio</td> <td>800x480</td> </tr> <tr> <td>显示模式 Display mode</td> <td>Transmissive Normally White</td> </tr> <tr> <td>视察方向 Display direction</td> <td><input type="checkbox"/> 6 <input checked="" type="checkbox"/> 12 <input type="checkbox"/> 3 <input type="checkbox"/> 9 <input type="checkbox"/> Free</td> </tr> <tr> <td>对比度 Contrast ratio</td> <td>500:1</td> </tr> <tr> <td>亮度 Luminance</td> <td>250 (Typ) 200 (Min)</td> </tr> <tr> <td>均匀性 Uniformity</td> <td>75% MIN</td> </tr> <tr> <td>接口类型 Interface</td> <td>RGB</td> </tr> <tr> <td>供电电压 Power supply</td> <td><input checked="" type="checkbox"/> 3.3 <input type="checkbox"/> 5.0</td> </tr> <tr> <td>工作温度 Operation temperature</td> <td>-20~70°C</td> </tr> <tr> <td>储存温度 Storage temperature</td> <td>-30~80°C</td> </tr> <tr> <td>驱动芯片 Driver IC</td> <td>/</td> </tr> <tr> <td>连接方式 Connection mode</td> <td><input checked="" type="checkbox"/> FPC Plug-in <input type="checkbox"/> FPC Welded <input type="checkbox"/> Connector</td> </tr> <tr> <td>环保要求 Environmental requirements</td> <td><input checked="" type="checkbox"/> RoHS-2.0 <input type="checkbox"/> REACH</td> </tr> <tr> <td>未标注公差 Unmarked tolerance</td> <td>±0.2mm</td> </tr> </table>		TECHNOLOGY CHARACTERISTICS LCM		尺寸 SIZE	7.0 inch	分辨率 Resolution ratio	800x480	显示模式 Display mode	Transmissive Normally White	视察方向 Display direction	<input type="checkbox"/> 6 <input checked="" type="checkbox"/> 12 <input type="checkbox"/> 3 <input type="checkbox"/> 9 <input type="checkbox"/> Free	对比度 Contrast ratio	500:1	亮度 Luminance	250 (Typ) 200 (Min)	均匀性 Uniformity	75% MIN	接口类型 Interface	RGB	供电电压 Power supply	<input checked="" type="checkbox"/> 3.3 <input type="checkbox"/> 5.0	工作温度 Operation temperature	-20~70°C	储存温度 Storage temperature	-30~80°C	驱动芯片 Driver IC	/	连接方式 Connection mode	<input checked="" type="checkbox"/> FPC Plug-in <input type="checkbox"/> FPC Welded <input type="checkbox"/> Connector	环保要求 Environmental requirements	<input checked="" type="checkbox"/> RoHS-2.0 <input type="checkbox"/> REACH	未标注公差 Unmarked tolerance	±0.2mm	<p><b>TOP VIEW</b></p>		<p><b>SIDE VIEW</b></p>	<p><b>BOTTOM VIEW</b></p>	<p><b>BOTTOM VIEW</b></p>	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2">PIN</th> </tr> <tr><td>01</td><td>VLED+</td></tr> <tr><td>02</td><td>VLED+</td></tr> <tr><td>03</td><td>VLED-</td></tr> <tr><td>04</td><td>VLED-</td></tr> <tr><td>05</td><td>GND</td></tr> <tr><td>06</td><td>VCOM</td></tr> <tr><td>07</td><td>DVDD</td></tr> <tr><td>08</td><td>MODE</td></tr> <tr><td>09</td><td>DE</td></tr> <tr><td>10</td><td>VS</td></tr> <tr><td>11</td><td>HS</td></tr> <tr><td>12</td><td>B7</td></tr> <tr><td>13</td><td>B6</td></tr> <tr><td>14</td><td>B5</td></tr> <tr><td>15</td><td>B4</td></tr> <tr><td>16</td><td>B3</td></tr> <tr><td>17</td><td>B2</td></tr> <tr><td>18</td><td>B1</td></tr> <tr><td>19</td><td>B0</td></tr> <tr><td>20</td><td>G7</td></tr> <tr><td>21</td><td>G6</td></tr> <tr><td>22</td><td>G5</td></tr> <tr><td>23</td><td>G4</td></tr> <tr><td>24</td><td>G3</td></tr> <tr><td>25</td><td>G2</td></tr> <tr><td>26</td><td>G1</td></tr> <tr><td>27</td><td>G0</td></tr> <tr><td>28</td><td>R7</td></tr> <tr><td>29</td><td>R6</td></tr> <tr><td>30</td><td>R5</td></tr> <tr><td>31</td><td>R4</td></tr> <tr><td>32</td><td>R3</td></tr> <tr><td>33</td><td>R2</td></tr> <tr><td>34</td><td>R1</td></tr> <tr><td>35</td><td>R0</td></tr> <tr><td>36</td><td>GND</td></tr> <tr><td>37</td><td>DCLK</td></tr> <tr><td>38</td><td>GND</td></tr> <tr><td>39</td><td>L/R</td></tr> <tr><td>40</td><td>UD</td></tr> <tr><td>41</td><td>VGH</td></tr> <tr><td>42</td><td>VGL</td></tr> <tr><td>43</td><td>AVDD</td></tr> <tr><td>44</td><td>RESET</td></tr> <tr><td>45</td><td>NC</td></tr> <tr><td>46</td><td>VCOM</td></tr> <tr><td>47</td><td>DITHB</td></tr> <tr><td>48</td><td>GND</td></tr> <tr><td>49</td><td>NC</td></tr> <tr><td>50</td><td>NC</td></tr> </table>	PIN		01	VLED+	02	VLED+	03	VLED-	04	VLED-	05	GND	06	VCOM	07	DVDD	08	MODE	09	DE	10	VS	11	HS	12	B7	13	B6	14	B5	15	B4	16	B3	17	B2	18	B1	19	B0	20	G7	21	G6	22	G5	23	G4	24	G3	25	G2	26	G1	27	G0	28	R7	29	R6	30	R5	31	R4	32	R3	33	R2	34	R1	35	R0	36	GND	37	DCLK	38	GND	39	L/R	40	UD	41	VGH	42	VGL	43	AVDD	44	RESET	45	NC	46	VCOM	47	DITHB	48	GND	49	NC	50	NC	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:15%;"></td> <td style="width:15%; text-align:center;">1</td> <td style="width:15%; text-align:center;">2</td> <td style="width:15%; text-align:center;">3</td> <td style="width:15%; text-align:center;">4</td> <td style="width:15%; text-align:center;">5</td> <td style="width:15%; text-align:center;">6</td> <td style="width:15%; text-align:center;">7</td> <td style="width:15%; text-align:center;">8</td> <td style="width:15%; text-align:center;">9</td> </tr> <tr> <td style="vertical-align: top;">C</td> <td colspan="2"> <p>测试点</p> </td> <td colspan="2" style="text-align:center;"> <p>Backlight LED Circuit 3S6P=18 CHIP-WHITE LED IF=120mA VF=8.4~10.5V</p> </td> <td colspan="2" style="text-align:center;"> <p>DRAWN</p> <p>Lai</p> </td> <td colspan="2" style="text-align:center;"> <p>TITLE</p> <p>MODULE SPEC.</p> </td> <td style="text-align:center;"> <p>Drawing NO: FN0700D054A</p> </td> </tr> <tr> <td style="vertical-align: top;">D</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2" style="text-align:center;"> <p>CHECKED</p> <p>Dong</p> </td> <td colspan="2" style="text-align:center;"> <p>Project No:</p> </td> <td style="vertical-align: top;">E</td> </tr> <tr> <td style="vertical-align: top;">E</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2" style="text-align:center;"> <p>APPROVED</p> <p>jack</p> </td> <td colspan="2" style="text-align:center;"> <p>Customer No:</p> </td> <td style="vertical-align: top;">F</td> </tr> <tr> <td style="vertical-align: top;">F</td> <td colspan="2"> <p>AQ03 按照实物更新最佳视角方向;</p> </td> <td colspan="2"> <p>Lai 2022-06-22 CSR APPROVED</p> </td> <td colspan="2" style="text-align:center;"> </td> <td colspan="2" style="text-align:center;"> <p>FANNAL ELECTRONICS CO., LTD</p> </td> <td style="vertical-align: top;">G</td> </tr> <tr> <td style="vertical-align: top;">G</td> <td colspan="2"> <p>AQ02 加入展开示意图纸</p> </td> <td colspan="2"> <p>Lai 2022-06-20</p> </td> <td colspan="2" style="text-align:center;"> <p>SHEET 1 OF 1</p> </td> <td colspan="2" style="text-align:center;"> <p>AMENDMENT</p> </td> <td style="vertical-align: top;">H</td> </tr> <tr> <td style="vertical-align: top;">H</td> <td colspan="2"> <p>A0 First issue</p> </td> <td colspan="2"> <p>Lai 2022-06-17</p> </td> <td colspan="2" style="text-align:center;"> <p>VER. SYMBOL</p> </td> <td colspan="2" style="text-align:center;"> <p>AMENDMENT</p> </td> <td style="vertical-align: top;">I</td> </tr> <tr> <td style="vertical-align: top;">I</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2" style="text-align:center;"> <p>SIGN DATE</p> </td> <td colspan="2" style="text-align:center;"> <p>AMENDMENT</p> </td> <td style="vertical-align: top;">J</td> </tr> </table>		1	2	3	4	5	6	7	8	9	C	<p>测试点</p>		<p>Backlight LED Circuit 3S6P=18 CHIP-WHITE LED IF=120mA VF=8.4~10.5V</p>		<p>DRAWN</p> <p>Lai</p>		<p>TITLE</p> <p>MODULE SPEC.</p>		<p>Drawing NO: FN0700D054A</p>	D					<p>CHECKED</p> <p>Dong</p>		<p>Project No:</p>		E	E					<p>APPROVED</p> <p>jack</p>		<p>Customer No:</p>		F	F	<p>AQ03 按照实物更新最佳视角方向;</p>		<p>Lai 2022-06-22 CSR APPROVED</p>				<p>FANNAL ELECTRONICS CO., LTD</p>		G	G	<p>AQ02 加入展开示意图纸</p>		<p>Lai 2022-06-20</p>		<p>SHEET 1 OF 1</p>		<p>AMENDMENT</p>		H	H	<p>A0 First issue</p>		<p>Lai 2022-06-17</p>		<p>VER. SYMBOL</p>		<p>AMENDMENT</p>		I	I					<p>SIGN DATE</p>		<p>AMENDMENT</p>		J
TECHNOLOGY CHARACTERISTICS LCM																																																																																																																																																																																																																															
尺寸 SIZE	7.0 inch																																																																																																																																																																																																																														
分辨率 Resolution ratio	800x480																																																																																																																																																																																																																														
显示模式 Display mode	Transmissive Normally White																																																																																																																																																																																																																														
视察方向 Display direction	<input type="checkbox"/> 6 <input checked="" type="checkbox"/> 12 <input type="checkbox"/> 3 <input type="checkbox"/> 9 <input type="checkbox"/> Free																																																																																																																																																																																																																														
对比度 Contrast ratio	500:1																																																																																																																																																																																																																														
亮度 Luminance	250 (Typ) 200 (Min)																																																																																																																																																																																																																														
均匀性 Uniformity	75% MIN																																																																																																																																																																																																																														
接口类型 Interface	RGB																																																																																																																																																																																																																														
供电电压 Power supply	<input checked="" type="checkbox"/> 3.3 <input type="checkbox"/> 5.0																																																																																																																																																																																																																														
工作温度 Operation temperature	-20~70°C																																																																																																																																																																																																																														
储存温度 Storage temperature	-30~80°C																																																																																																																																																																																																																														
驱动芯片 Driver IC	/																																																																																																																																																																																																																														
连接方式 Connection mode	<input checked="" type="checkbox"/> FPC Plug-in <input type="checkbox"/> FPC Welded <input type="checkbox"/> Connector																																																																																																																																																																																																																														
环保要求 Environmental requirements	<input checked="" type="checkbox"/> RoHS-2.0 <input type="checkbox"/> REACH																																																																																																																																																																																																																														
未标注公差 Unmarked tolerance	±0.2mm																																																																																																																																																																																																																														
PIN																																																																																																																																																																																																																															
01	VLED+																																																																																																																																																																																																																														
02	VLED+																																																																																																																																																																																																																														
03	VLED-																																																																																																																																																																																																																														
04	VLED-																																																																																																																																																																																																																														
05	GND																																																																																																																																																																																																																														
06	VCOM																																																																																																																																																																																																																														
07	DVDD																																																																																																																																																																																																																														
08	MODE																																																																																																																																																																																																																														
09	DE																																																																																																																																																																																																																														
10	VS																																																																																																																																																																																																																														
11	HS																																																																																																																																																																																																																														
12	B7																																																																																																																																																																																																																														
13	B6																																																																																																																																																																																																																														
14	B5																																																																																																																																																																																																																														
15	B4																																																																																																																																																																																																																														
16	B3																																																																																																																																																																																																																														
17	B2																																																																																																																																																																																																																														
18	B1																																																																																																																																																																																																																														
19	B0																																																																																																																																																																																																																														
20	G7																																																																																																																																																																																																																														
21	G6																																																																																																																																																																																																																														
22	G5																																																																																																																																																																																																																														
23	G4																																																																																																																																																																																																																														
24	G3																																																																																																																																																																																																																														
25	G2																																																																																																																																																																																																																														
26	G1																																																																																																																																																																																																																														
27	G0																																																																																																																																																																																																																														
28	R7																																																																																																																																																																																																																														
29	R6																																																																																																																																																																																																																														
30	R5																																																																																																																																																																																																																														
31	R4																																																																																																																																																																																																																														
32	R3																																																																																																																																																																																																																														
33	R2																																																																																																																																																																																																																														
34	R1																																																																																																																																																																																																																														
35	R0																																																																																																																																																																																																																														
36	GND																																																																																																																																																																																																																														
37	DCLK																																																																																																																																																																																																																														
38	GND																																																																																																																																																																																																																														
39	L/R																																																																																																																																																																																																																														
40	UD																																																																																																																																																																																																																														
41	VGH																																																																																																																																																																																																																														
42	VGL																																																																																																																																																																																																																														
43	AVDD																																																																																																																																																																																																																														
44	RESET																																																																																																																																																																																																																														
45	NC																																																																																																																																																																																																																														
46	VCOM																																																																																																																																																																																																																														
47	DITHB																																																																																																																																																																																																																														
48	GND																																																																																																																																																																																																																														
49	NC																																																																																																																																																																																																																														
50	NC																																																																																																																																																																																																																														
	1	2	3	4	5	6	7	8	9																																																																																																																																																																																																																						
C	<p>测试点</p>		<p>Backlight LED Circuit 3S6P=18 CHIP-WHITE LED IF=120mA VF=8.4~10.5V</p>		<p>DRAWN</p> <p>Lai</p>		<p>TITLE</p> <p>MODULE SPEC.</p>		<p>Drawing NO: FN0700D054A</p>																																																																																																																																																																																																																						
D					<p>CHECKED</p> <p>Dong</p>		<p>Project No:</p>		E																																																																																																																																																																																																																						
E					<p>APPROVED</p> <p>jack</p>		<p>Customer No:</p>		F																																																																																																																																																																																																																						
F	<p>AQ03 按照实物更新最佳视角方向;</p>		<p>Lai 2022-06-22 CSR APPROVED</p>				<p>FANNAL ELECTRONICS CO., LTD</p>		G																																																																																																																																																																																																																						
G	<p>AQ02 加入展开示意图纸</p>		<p>Lai 2022-06-20</p>		<p>SHEET 1 OF 1</p>		<p>AMENDMENT</p>		H																																																																																																																																																																																																																						
H	<p>A0 First issue</p>		<p>Lai 2022-06-17</p>		<p>VER. SYMBOL</p>		<p>AMENDMENT</p>		I																																																																																																																																																																																																																						
I					<p>SIGN DATE</p>		<p>AMENDMENT</p>		J																																																																																																																																																																																																																						

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

V1

2022-10-26

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700054B

FN0700D054B Product Specification

6 OF 27

### 3.0 ABSOLUTE MAXIMUM RATINGS /绝对最大额定值

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit.

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Voltage	VDD	-0.3	5.0	V	
	AVDD	6.5	13.5	V	
	VGH	-0.3	40.0	V	
	VGL	-20.0	0.3	V	
	VGH-VGL	-	40.0	V	
Operating Temperature	T <sub>OP</sub>	-20	+70	°C	
Storage Temperature	T <sub>ST</sub>	-30	+80	°C	
LED Forward Current	I <sub>f</sub>		25	mA	Each LED
Humidity	RH	--	90%(Max60 °C)	RH	

## 4.0 ELECTRICAL SPECIFICATIONS/电气规范

### 4.1 TFT LCM Module

[Ta = 25 ± 2 °C]


Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Power Supply Voltage	DVDD	3.0	3.3	3.6	V
	AVDD	10.2	10.4	10.6	V
	VGH	14.5	15.0	15.5	V
	VGL	-10.5	-10.0	-9.5	V
	VCOM	3.54	4.04	4.54	V
Current for Driver	IDVDD	1.0	4.0	10	mA
	IAVDD	5.0	20	50	mA
	IVGH	0.05	0.2	1.0	mA
	IVGL	0.2	0.5	1.0	mA
Input Voltage "H" Level	VIH	0.7*DVDD		DVDD	V
Input Voltage "L" Level	VIL	GND		0.3*DVDD	V

Note 1: Be sure to apply DVDD and VGL to the LCD first, and then apply VGH.

Note 2: DVDD setting should match the signals output voltage (refer to Note 3) of customer's system board.

Note 3: DCLK, HS, VS, RESET, U/D, L/R, DE, R0~R7, G0~G7, B0~B7, MODE, DITHB.

Note 4: Typical VCOM is only a reference value. It must be optimized according to each LCM. Please use VR and base on below application circuit.

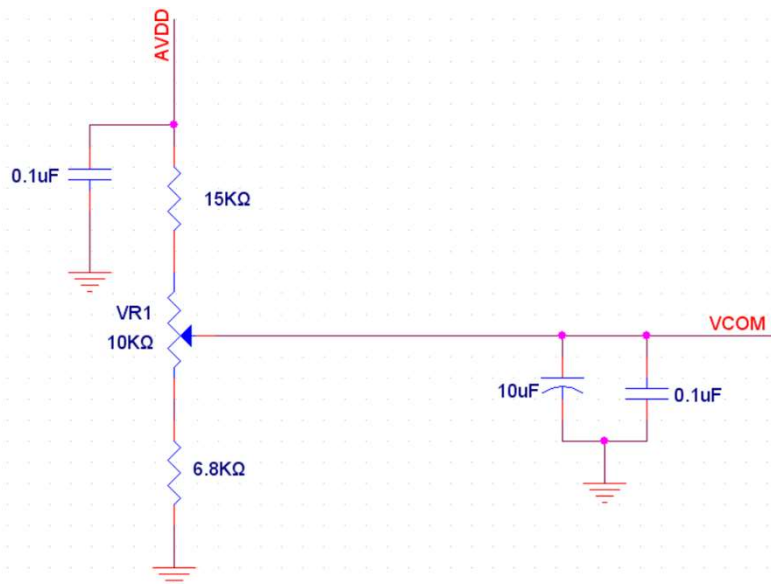

**PRODUCT GROUP**

REV

ISSUE DATE



TFT- LCM PRODUCT

V1

2022-10-26

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700054B

FN0700D054B Product Specification

8 OF 27

## 4.2 Backlight Driving Conditions /背光驱动条件

[Ta =25 ± 2 °C]

Parameter	Symbol	Values			Unit	Notes
		Min.	Typ.	Max.		
LED Power supply Input voltage	VLED	8.4	9.8	11.0	V	Note 1
Power supply current for Back light	ILED	-	120	--	mA	-
LED Life Time	--	--	50000	--	Hrs	Note 2

Note1: Under LCM operating, the stable forward current should be inputted. And forward voltage is for reference only.

Note2: Optical performance should be evaluated at Ta=25°C. if LED is driven by high current, high ambient temperature & Humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.



## 5.0 Interface Description/接口说明

Connector Name/Designation	Interface Connector/Interface Card
Type Part Number	FPC
Mating Housing Part Number	FH12A-50S-0.5SH

### 5.1 Pin assignment for LCM module /模组引脚分配

Pin No.	Symbol	I/O	Description
1-2	VLED+	P	Power for LED backlight (Anode)
3-4	VLED-	P	Power for LED backlight (Cathode)
5	GND	P	Power ground
6	VCOM	I	Common voltage
7	DVDD	P	Power for Digital Circuit
8	MODE	I	DE/SYNC mode select
9	DE	I	Data Input Enable
10	VS	I	Vertical Sync Input
11	HS	I	Horizontal Sync Input
12-19	B7-B0	I	Blue data(MSB B7) Blue data Blue data(LSB B0)
20-27	G7-G0	I	Green data(MSB G7) Green data Green data(LSB G0)
28-35	R7-R0	I	Red data(MSB R7) Red data Red data(LSB R0)
36	GND	P	Power ground
37	DCLK	I	Sample clock
38	GND	P	Power ground
39	L/R	I	Left / right selection
40	U/D	I	Up/down selection
41	VGH	P	Gate ON Voltage
42	VGL	P	Gate OFF Voltage
43	AVDD	P	Power for Analog Circuit
44	RESET	I	Global reset pin.
45	NC	-	No connection
46	VCOM	I	Common Voltage
47	DITHB	I	Dithering function
48	GND	P	Power ground
49-50	NC	-	No connection

I: input, O: output, P: Power

Note 1: DE/SYNC mode select. Normally pull high.

When select DE mode, MODE="1", VS and HS must pull high.

When select SYNC mode, MODE="0", DE must be grounded.

Note 2: When input 18 bits RGB data, the two low bits of R,G and B data must be grounded.


Note 3: Data shall be latched at the falling edge of DCLK.

Note 4: Selection of scanning mode

Setting of scan control input		Scanning direction
U/D	L/R	
GND	DVDD	Up to down, left to right
DVDD	GND	Down to up, right to left
GND	GND	Up to down, right to left
DVDD	DVDD	Down to up, left to right

Note 5: Definition of scanning direction.

Refer to the figure as below:

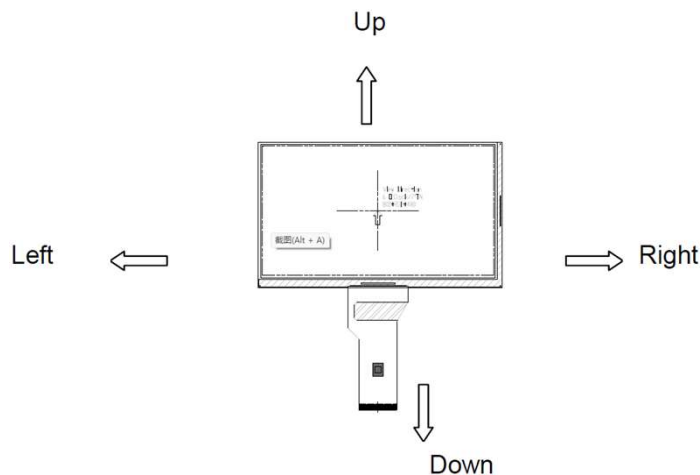

Note 6: Global reset pin. Active low to enter reset state. Suggest to connect with an RC reset circuit for stability. Normally pull high.

Note 7: Dithering function enable control, normally pull high.


When DITHB="1", Disable internal dithering function,

When DITHB="0", Enable internal dithering function,

Note 8: Reserve for LED power input.


**5.2 Power Sequence**

**a. Power on:**

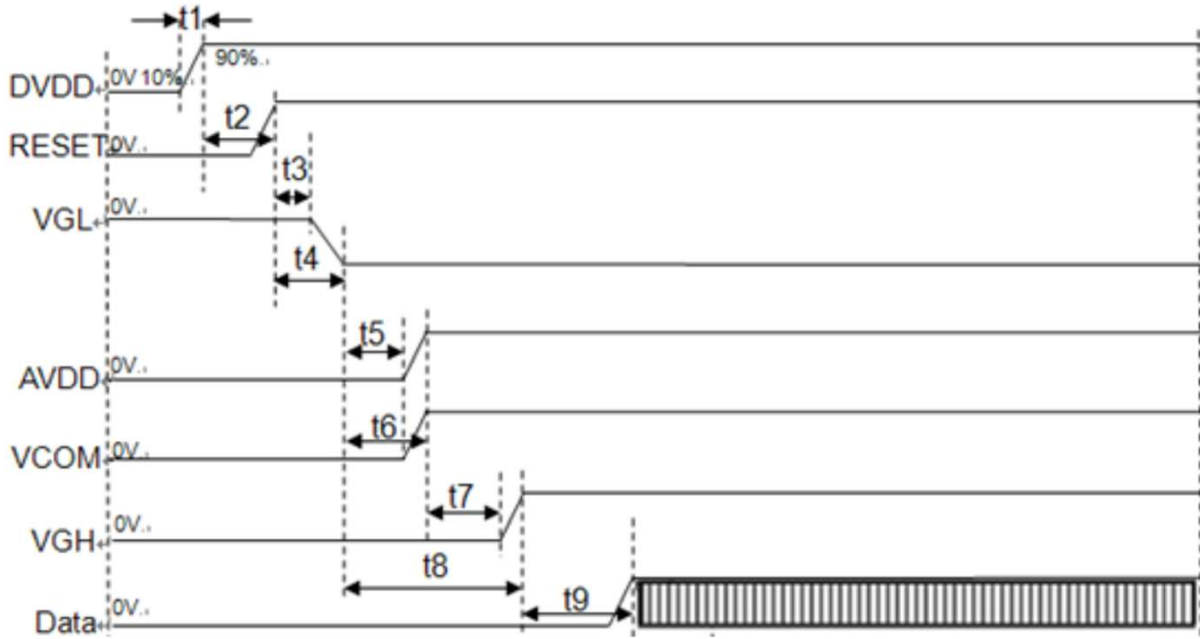

Symbol	SPEC			Unit
	Min.	Typ.	Max.	
t1	0.5	5	20	ms
t2	1	1	1.5	ms
t3	10	15	20	ms
t4	20	22	24	ms
t5	1	2	3	ms
t6	5	6	7	ms
t7	1.5	2	4	ms
t8	10	12	15	ms
t9	10	15	20	ms

**b. Power off:**

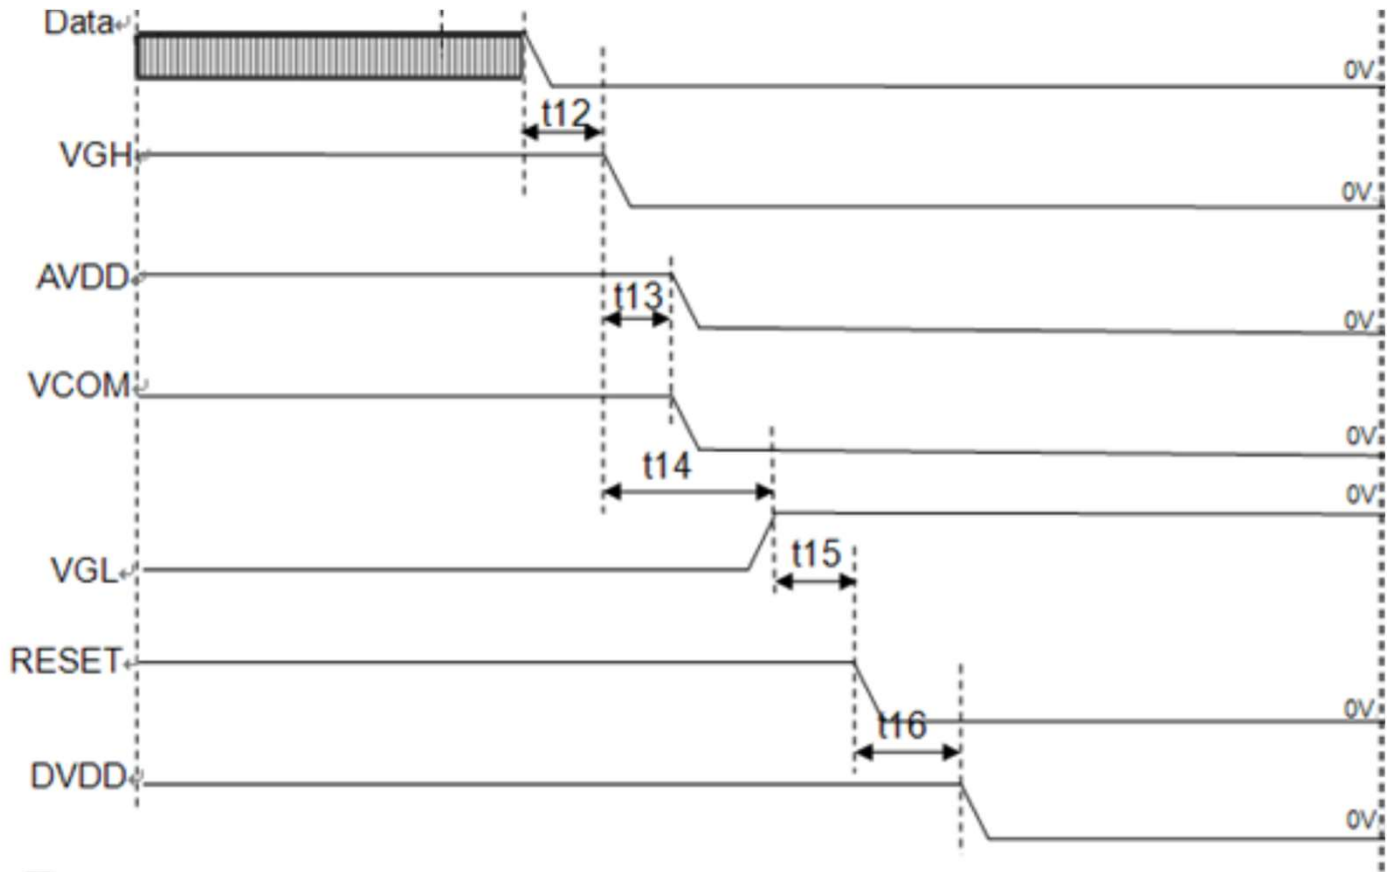

Symbol	SPEC			Unit
	Min.	Typ.	Max.	
t12	10	15	20	ms
t13	5	6	7	ms
t14	10	12	15	ms
t15	20	22	24	ms
t16	1	1.5	3	ms

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

V1

2022-10-26

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700054B


FN0700D054B Product Specification

13 OF 27

**5.3 AC Electrical Characteristics**

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
HS setup time	$T_{hst}$	8	10	20	ns	
HS hold time	$T_{hhd}$	8	120	800	ns	
VS setup time	$T_{vst}$	8	10	20	ns	
VS hold time	$T_{vhd}$	8	96000	640000	ns	
Data setup time	$T_{dsu}$	8	10	20	ns	
Data hole time	$T_{dhd}$	8	15	20	ns	
DE setup time	$T_{esu}$	8	15	20	ns	
DE hole time	$T_{ehd}$	8	15	20	ns	
DV <sub>DD</sub> Power On Slew rate	$T_{POR}$	1	10	20	ms	From 0 to 90% DV <sub>DD</sub>
RESET pulse width	$T_{Rst}$	1	2	5	ms	
DCLK cycle time	$T_{coh}$	20	30	40	ns	
DCLK pulse duty	$T_{cwh}$	40	50	60	%	

5.4 Input Clock and Data Timing Diagram

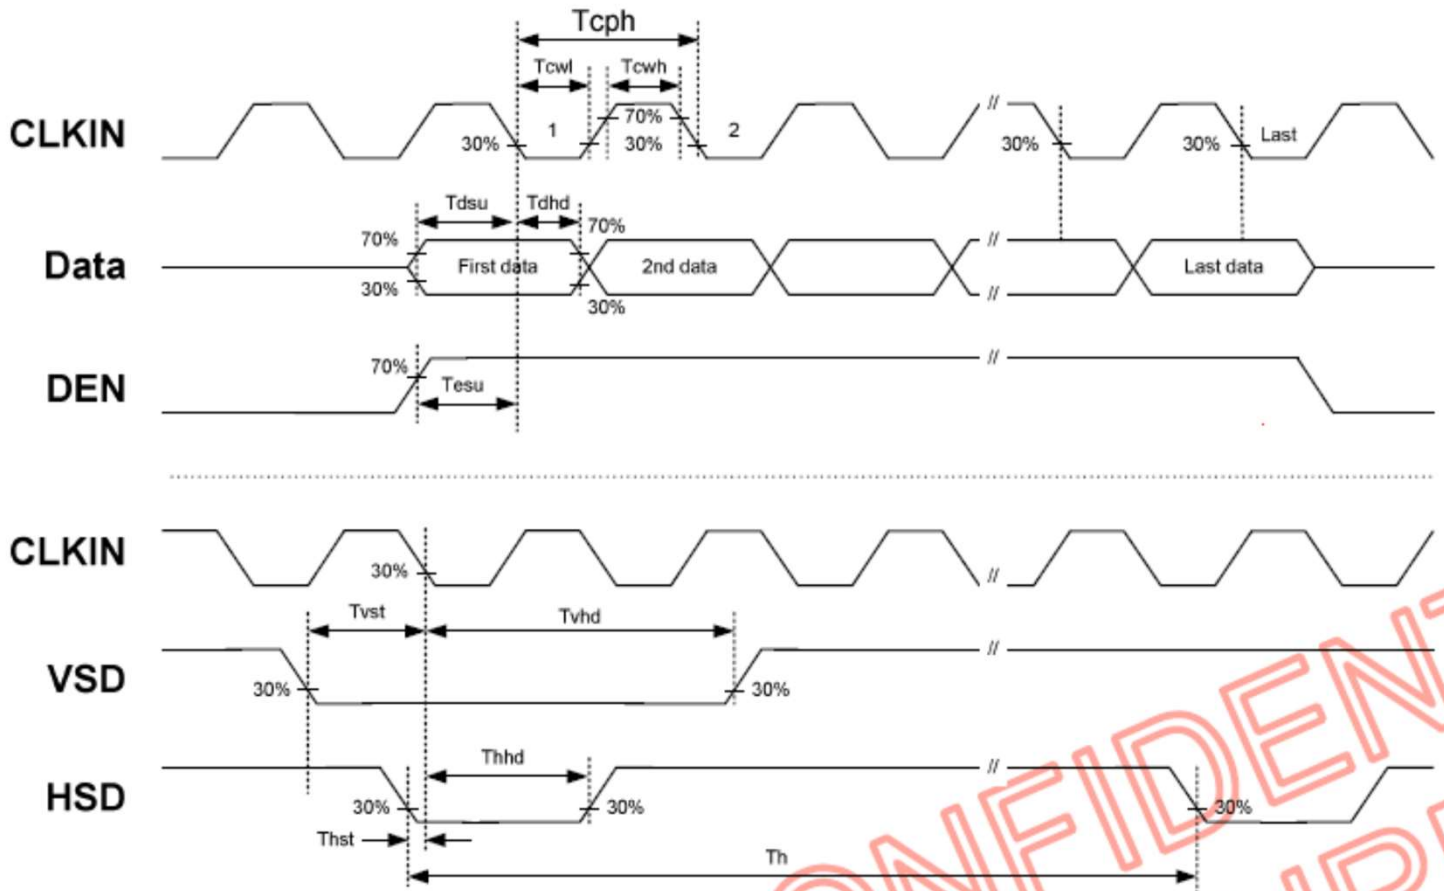

CONFIDENTIAL

# PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

V1

2022-10-26

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700054B

FN0700D054B Product Specification

15 OF 27

## 5.5 Timing

Item	Symbol	Values			Unit	Remark
		Min	Typ	Max		
Horizontal Display Area	thd	/	800	/	DCLK	
DCLK Frequency	fclk	26.4	33.3	46.8	MHZ	
One Horizontal Line	th	862	1056	1200	DCLK	
HS pulse width	thpw	1	6	40	DCLK	Note 1
HS Blanking	thb	46	46	46	DCLK	Note 1
HS Front Porch	thfp	16	210	354	DCLK	
Vertical Display Area	tvd	/	480	/	TH	
VS period time	tv	510	525	650	TH	
VS pulse width	tvpw	1	3	20	TH	Note 2
VS Blanking	tvb	23	23	23	TH	Note 2
VS Front Porch	tvfp	7	22	147	TH	

Note1: HS Blanking has included HS pulse width

Note2: VS Blanking has included VS pulse width

Note: Frame rate  $60 \pm 5\text{Hz}$

### 5.6 Data Input Format

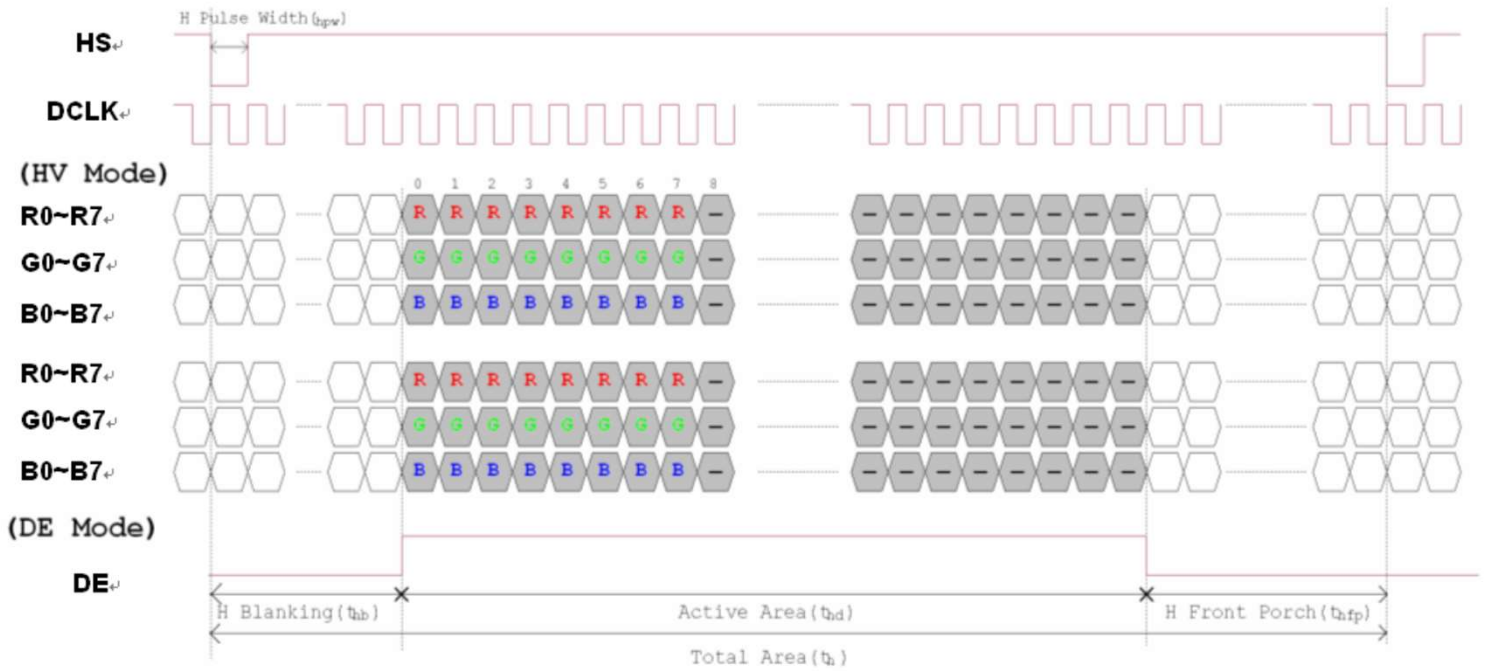


Figure 3. 1 Horizontal input timing diagram.

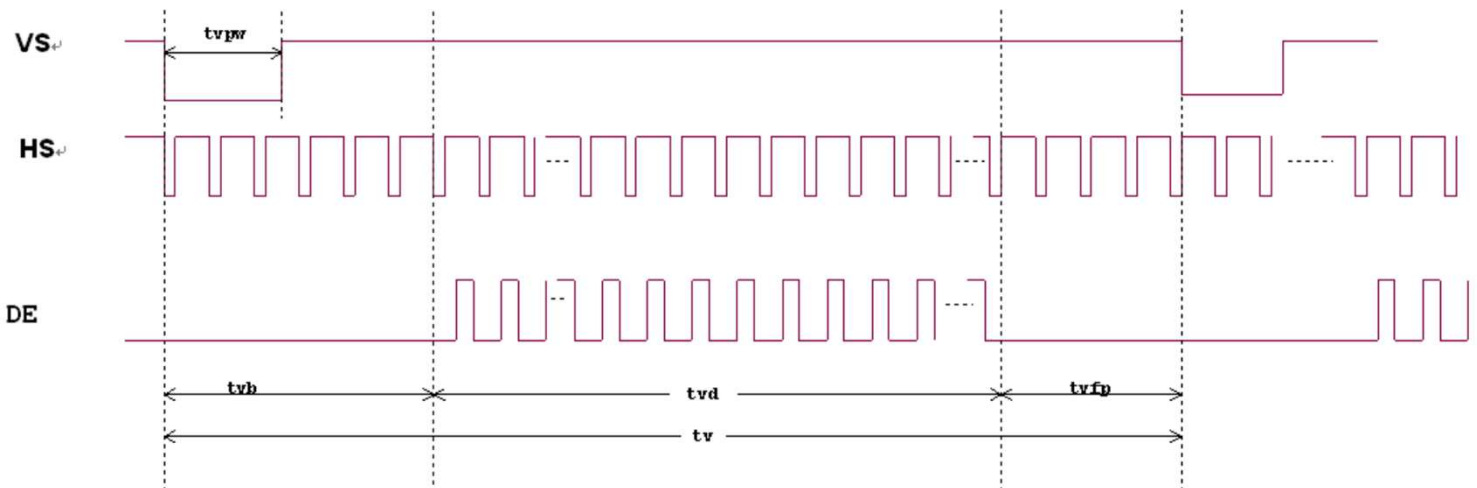


Figure 3. 2 Vertical input timing diagram.



## 6.0 OPTICAL SPECIFICATIONS /光学规格

### 6.1 Overview /概述


The test of optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$ lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\phi$  equal to  $0^\circ$ . We refer to  $\theta=0$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta=90$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta=180$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta=270$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\phi$ , the center of the measuring spot on the display surface shall stay fixed.

### 6.2 Optical Specifications /光学规格

Item	Symbol	Condition	Min	Typ.	Max	Unit	Note
Viewing Angle	$\theta_L$	$Cr \geq 10$	60	70	--	deg	Note 1
	$\theta_R$		60	70	--		
	$\psi_T$		40	50	--		
	$\psi_B$		60	70	--		
Contrast Ratio	Cr	$\theta=0^\circ$	400	500		-	Note 2
Response Time	$Tr+Tf$	$FF=0^\circ$	--	25	50	ms	Note 3
Color Coordinate of CIE1931	Rx	$\theta=0^\circ$	0.543	0.573	0.603	-	Note 4
	Ry		0.295	0.325	0.355		
	Gx		0.313	0.343	0.373		
	Gy		0.570	0.600	0.630		
	Bx		0.132	0.152	0.182		
	By		0.048	0.078	0.108		
	Wx		0.280	0.310	0.340		
	Wy		0.300	0.330	0.370		
Luminance	L		--	250	--	cd/m <sup>2</sup>	

**Note 1: The definition of Viewing Angle**

Refer to the graph below marked by  $\theta$  and  $\phi$ .

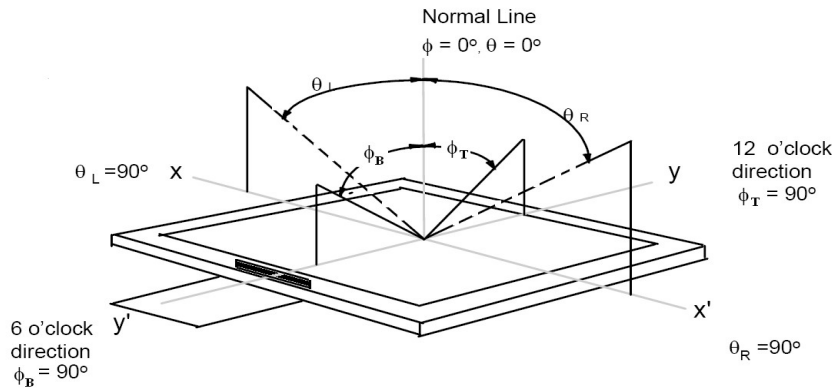

**Note 2: The definition of Contrast Ratio**

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance When LCD is at "White" state}}{\text{Luminance When LCD is at "Black" state}}$$

(Contrast Ratio is measured in optimum common electrode voltage)

**Note 3: Definition of Response time.** (Test LCD using RD80S or similar equipments):

The output sign also photo detector are measured when the input sign also are changed from "black" to "white" (Voltage falling time) and from "white" to "black" (Voltage rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figures below.

**Note 4: Color Coordinates of CIE 1931**


The test condition is at ILED=20mA and measured on the surface of LCD module at 25°C.

Measurement equipment: CS2000 or similar equipments


The Color Coordinate (CIE 1931) is the measurement of the center of the display shown in below figure.

**Note 5: Definition of Color of CIE Coordinate and NTSC Ratio.**

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

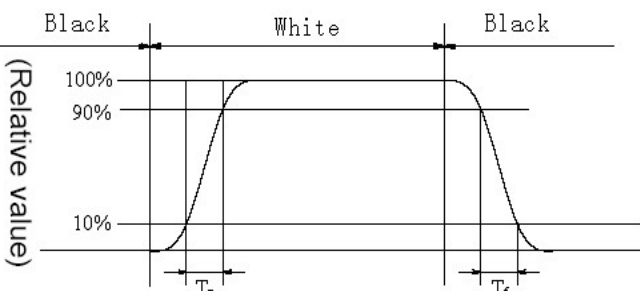

Note 3

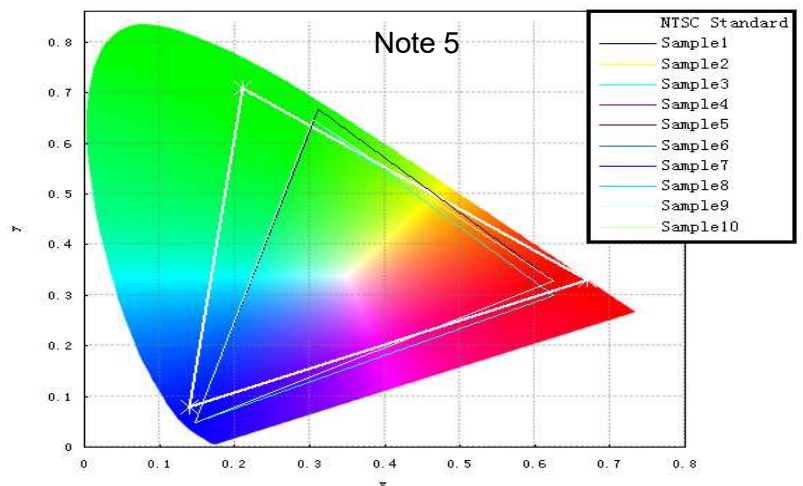

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

V1

2022-10-26

SPEC. NUMBER

SPEC. TITLE

PAGE

AM-0700054B


FN0700D054B Product Specification

19 OF 27

## 7.0 RELIABILITY TEST /可靠性测试

The Reliability test items and its conditions are shown in below.

No	Test Items	Conditions	Testing standard
1	High temperature storage test	80°C 240hr	IEC60068-2-1:2007 GB2423.2-2008
2	Low temperature storage test	-30°C 240hr	
3	Low temperature operation test	-20°C 240hr	
4	High temperature operation test	70°C 240hr	
5	High temperature & humidity (storage test)	60°C 90%RH 240hr	IEC60068-2-78:2001 GB/T2423.3-2006
6	Thermal Shock Test	-30°C~80°C 1hr/cycle 10cycle	Start with cold temperature End with high temperature IEC60068-2-14:1984, GB2423.22-2002
7	Vibration Test	10Hz-55Hz 100m/s <sup>2</sup> 120min	IEC60068-2-32:1990 GB/T2423.8-1995
8	Mechanical shock	100G ±X, ±Y, ±Z, 3times for each direction	
9	Dropping test	Height: 60 cm, 1 corner, 3 edges, 6 surfaces	
10	ESD test	C=150pF, R=330 Ω, 5 points/panel Air:±8KV, 5 times; Contact: ±4KV, 5 times;	IEC61000-4-2:2001 GB/T17626.2-2006 Class C


<b>PRODUCT GROUP</b>	REV	ISSUE DATE	
TFT- LCM PRODUCT	V1	2022-10-26	
SPEC. NUMBER AM-0700054B	SPEC. TITLE FN0700D054B Product Specification		PAGE 20 OF 27

- **8.0 Precautions /注意事项**

- Please pay attention to the followings when you use this TFT LCD Panel.

- **8.1 Mounting Precautions /安装注意事项**

- (1) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (2) You must mount a module using specified mounting holes (Details refer to the drawings).
- (3) Please make sure to avoid external forces applied to the Source PCB or FPC and D-IC during the process of handling or assembling. If not, It causes panel damage or malfunction.
- (4) Note that polarizers are very fragile and could be easily damaged. Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
- (5) Do not pull or fold the source D-IC which connect the source PCB or FPC and the panel.
- Do not pull or fold the LED wire.
- (6) After removing the protective film, when the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with alcohol or purified water.
- Do not strong polar solvent because they cause chemical damage to the polarizer.
- (7) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (8) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (9) Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass may be broken.
- (10) Do not disassemble the module.
- (11) To determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- (12) If the customer's set presses the main parts of the LCD, the LCD may show the abnormal display. But this phenomenon does not mean the malfunction of the LCD and should be pressed by the way of mutual agreement.
- (13) Do not drop water or any chemicals onto the LCD's surface.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V1	2022-10-26	
SPEC. NUMBER AM-0700054B	SPEC. TITLE FN0700D054B Product Specification		PAGE 21 OF 27


## 8.2 Operating Precautions /操作注意事项

- (1) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (2) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (3) The electrochemical reaction caused by DC voltage will lead to LCD degradation, so DC drive should be avoided.
- (4) The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.
- (5) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.
- (6) Design the length of cable to connect between the connector for back-light and the converter as short as possible and the shorter cable shall be connected directly.  
The longer cable between that of back-light and that of converter may cause the luminance of LED to lower and need a higher startup voltage(Vs).
- (7) Connectors are precise devices for connecting PCB and transmitting electrical signals. Operators should insert and unplug MDL in parallel when assembling MDL.
- (8) Do not connect or disconnect the cable to/ from the module at the "Power On" condition.
- (9) When the module is operating, do not lose CLK, ENAB signals. If any one these signals is lost, the LCD panel would be damaged.
- (10) Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (11) Do not re-adjust variable resistor or switch etc.
- (12) For the Q/Single/OC Product, If the LED designed side view, LED bar should be putted in the Long/short side ; Otherwise, its reliability and function may not be guaranteed.

注：  
 ①(1)涉及到Pol相关条目适用于OC/MDL出货产品，  
 ②(6)(7)涉及到connector相关适用于OC/MDL出货产品  
 ③ (12) 涉及到客户进行BLU设计， LED Bar位置需要避开GOA位置；

## 8.3 Electrostatic Discharge Control /静电放电控制

- (1) Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly. Keep products as far away from static electricity as possible.
- (2) Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.

<b>PRODUCT GROUP</b>		<b>REV</b>	<b>ISSUE DATE</b>	
TFT- LCM PRODUCT		V1	2022-10-26	
<b>SPEC. NUMBER</b>	<b>SPEC. TITLE</b>			<b>PAGE</b>
AM-0700054B	FN0700D054B Product Specification			22 OF 27


#### 8.4 Precautions for Strong Light Exposure / 强光照射注意事项

It is not allowed to store or run directly in strong light or in high temperature and humidity for a long time; Strong light exposure causes degradation of polarizer and color filter.

#### 8.5 Storage Precautions / 存储注意事项

When storing modules as spares for a long time, the following precautions are necessary.

- (1) The polarizer surface should not come in contact with any other object.  
It is recommended that they be stored in the container in which they were shipped.  
Temperature : 5 ~ 40 °C
- (2) Humidity : 35 ~ 75 %RH
- (3) Period : 6 months
- (4) Control of ventilation and temperature is necessary.
- (5) Please make sure to protect the product from strong light exposure, water or moisture.  
Be careful for condensation.
- (6) Store in a polyethylene bag with sealed so as not to enter fresh air outside in it.
- (7) Do not store the LCD near organic solvents or corrosive gasses.
- (8) Please keep the Modules/OC/FOG at a circumstance shown below Fig.




#### 8.6 Precautions for Protection Film / 保护膜注意事项

- (1) Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- (2) In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

#### 8.7 Appropriate Condition for Display / 适当的显示条件

- (1) Normal operating condition
  - Temperature: 0 ~ 40°C
  - Operating Ambient Humidity : 10 ~ 90 %
  - Display pattern: dynamic pattern (Real display)
  - Suitable operating time: under 12 hours a day.
- (2) Special operating condition  
If the product will be used in extreme conditions such as high temperature, humidity, display patterns or 7\*24hrs operation time etc., It is strongly recommended to contact us for Application engineering advice. Otherwise, its reliability and function may not be guaranteed.
- (3) Black image or moving image is strongly recommended as a screen save.

<b>PRODUCT GROUP</b>	<b>REV</b>	<b>ISSUE DATE</b>	
TFT- LCM PRODUCT	V1	2022-10-26	
<b>SPEC. NUMBER</b>	<b>SPEC. TITLE</b>		<b>PAGE</b>
AM-0700054B	FN0700D054B Product Specification		23 OF 27

- (4) Lifetime in this spec. is guaranteed only when commercial display is used according to operating usages.
- (5) Please contact us in advance when you display the same pattern for a long time.
- (6) If the Module keeps displaying the same pattern for a long period of time, the image may be “sticked“ or “turn off” to the screen. To avoid image sticking, it is recommended to use a screen saver.
- (7) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.
- (8) Dew drop atmosphere should be avoided.
- (9) The storage room should be equipped with a good ventilation facility and avoid to expose to corrosive gas , which has a temperature controlling system.
- (10) The LCD should be avoided to expose to corrosive gas for long time, ,the LCD may be affected by the gas as SO<sub>2</sub> ,H<sub>2</sub>S etc.
- (11) When expose to drastic fluctuation of temperature (hot to cold or cold to hot) ,the LCD may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.
- (12) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation

## **8.8 Others /其他**

### **A. LC Leak /液晶泄露**

- If the liquid crystal material leaks from the panel, it is recommended to wash the LC with acetone or ethanol and then burn it.
- In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- If LC in mouth, mouth need to be washed, drink plenty of water to induce vomiting and follow medical advice.
- If LC touch eyes, eyes need to be washed with running water at least 15 minutes.

### **B. Rework /返工**

- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

- C.** In order to prevent potential problems, flicker should be adjusted by optimizing the Vcom value in customer LCM Line (适用于Q/Single/OC出货产品)

PRODUCT GROUP

REV

ISSUE DATE



TFT- LCM PRODUCT

V1

2022-10-26

SPEC. NUMBER  
AM-0700054B

SPEC. TITLE  
FN0700D054B Product Specification

PAGE  
24 OF 27


### 9.0 PACKING INFORMATION(产品形态: LCM )

LCM MODEL	LCM Qty. in the Box	Carton Size(mm)	LCM Qty. in the Pallet
FN0700D054B	80pcs/BOX	530*360*275mm	1600pcs/Pallet




PE BAG包折到Panel面

PE BAG: FHXXXXXXXXXX001A




EPE: FN070AM01-ZZ-V5.0



2片叠放, Panel对立

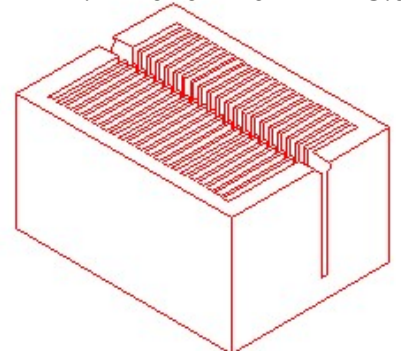

BOX: FN070AM01-ZX-V1.0

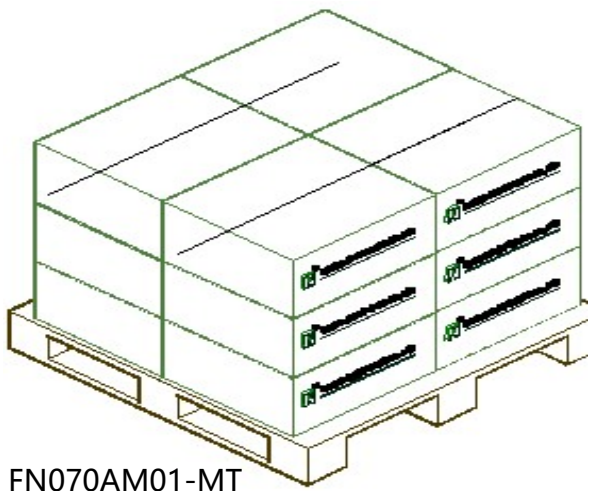

FN070AM01-MT

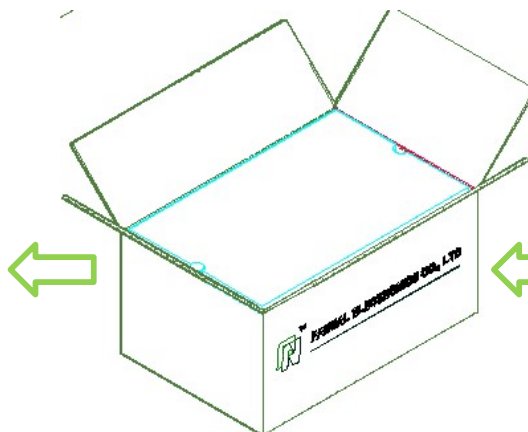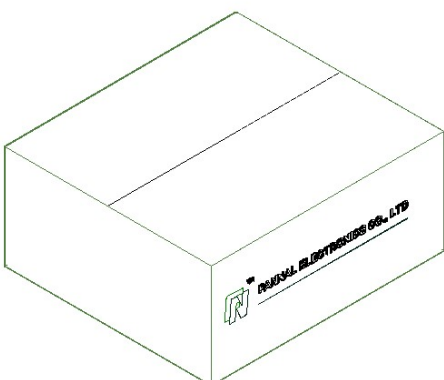



## 10.0 VISUAL INSPECTION CRITERIA FOR ALL CUSTOMERS /所有客户的目视检查标准

### 10.1 Sampling Method /抽样方法

Unless otherwise agreed upon in writing, the sampling inspection shall be applied to the Customers incoming inspection.

- 10.1.1 Lot size : 1 pallet per same model
- 10.1.2 Sampling type : Random sampling
- 10.1.3 Inspection level : II
- 10.1.4 Sampling table : MIL-STD-105E

### 10.2 Inspection Environment /检验环境

#### 10.2.1 Ambient conditions

- a. Ambient Temperature:  $25 \pm 3^{\circ}\text{C}$
- b. Relative Humidity:  $65 \pm 20\% \text{RH}$
- c. Ambient Illumination: 300-700LUX (Normal: 500LUX)

#### 10.2.2 Viewing Distance

The distance between the LCM and the inspector's eyes shall be at least 30cm-50cm

#### 10.2.3 Viewing Angle


performing in front of the panel

[Vertical] :  $\pm 25^{\circ}$

[Horizontal] :  $\pm 40^{\circ}$

#### 10.2.4 Inspection Area:

Display Area (Active Area)

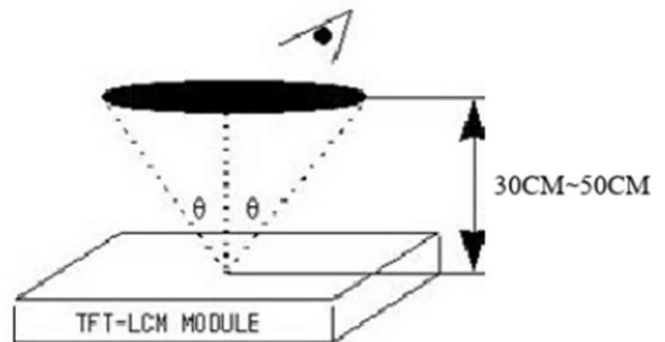

### 10.3 Definitions /定义

#### 10.3.1 Dark / Bright Spots

Points on display which appear dark/bright and usually result from the contamination.

These defects do not vary in size or intensity (contrast) when contrast is varied.

#### 10.3.2 Dark / Bright Lines

Lines on display which appear dark/bright and usually result from the contamination.

#### 10.3.3 Polarizer Scratch


Lines on display which are seen across a darker background and do not vary in size.

#### 10.3.4 Polarizer Dent

White spots on display which appear against a darker background and do not vary in size.

#### 10.3.5 Bright Dot Defects

Dots (sub-pixels) on display which appear bright in the display area and visible through the 5%ND filter at Black Pattern.

<b>PRODUCT GROUP</b>	REV	ISSUE DATE	
TFT- LCM PRODUCT	V1	2022-10-26	
SPEC. NUMBER AM-0700054B	SPEC. TITLE FN0700D054B Product Specification		PAGE 26 OF 27

#### 10.3.6 Dark Dot Defects

Dots(sub-pixels)on display which appear dark in the display area at R.G.B Color Pattern.

#### 10.3.7 Line Defects

All line defects on display which appear bright/dark such as vertical, horizontal, or cross lines.

#### 10.3.8 Mura

Mura on display which appears darker/brighter against background brightness on parts of display area.

#### 10.3.9 BM Defects

Bright(white)Points on display which are off BM(Black Matrix).

#### 10.3.10 Visual Inspection

Inspection for LCM when the unit turns on.

#### 10.3.11 Appearance Inspection

External inspection for LCM when the unit turns off.

#### 10.3.12 Other

Defects which cannot be classified into the above defect definitions.

Note 1: Bright& Dark dots are not smaller than a sub-pixel(Dots smaller than a sub-pixel are not counted as defect dots)

### 10.4 Inspectin Criteria /检验标准

Refer to 《TFT LCM general inspection standard》

### 10.5 Verification /验证

The supplier can verify the defective LCMs to segregate the responsibilities at customer's facility or can request the Customer to ship the defective LCMs to assigned place for verification

This verification result shall be agreed mutually by the Customer and Supplier. This result can be corrected/changed after detail failure analysis at Supplier's facilities.

### 10.6 Supplier Induced Defects /供应商引起的缺陷

All of the Supplier induced defective LCMs shall be returned to the Supplier for repair or replacement.

Before return the defective LCMs, the Customer needs Supplier's confirmation with RMA Number.

All of the returned LCMs shall be returned to the Customer within agreed time period.

**10.7 Customer Induced Defects /顾客引起的缺陷**

The Customer can return the customer induced defective LCMs to the Supplier for repair. The repair cost for Customer induced defective LCMs shall be agreed with both parties, Customer and Supplier.

**10.8 Warranty Period /质量保证期**

In-warranty period is Eighteen(18)Months from manufacturing month of LCM

Note :

- a. Eighteen months are composed of twelfth months in-warranty period and sixth months distribution period
- b. The manufacturing Month is on the LCMs as Supplier's serial No.

**10.9 Repair Warranty /维修保证书**

Repair warranty is Twelve(12)Months from repaired month for repaired LCMs

Note : a. The Label for repair will be added after repairing.

**10.10 Warranty avoidance /避免担保**

The warranty will be avoided in cases of below:

- a. When the warranty period is expired.
- b. The Customer induced defective LCMs.
- c. When the LCMs were repaired by 3rd party without Supplier's approval.
- d. When the LCMs were treated like Disassemble and Rework by the Customer and/or Customer's representatives without Supplier's approval.

**10.11 Others /其他**

If any problems arise with the LCMs supplied by supplier, the customer and supplier will cooperate and make efforts to solve it with mutual confidence and respect