

PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF FANNAL AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF FANNAL AND MUST BE RETURNED TO FANNAL UPON ITS REQUEST



SPEC. NUMBER

AM-1010022A

PRODUCT GROUP

TFT- LCM

REV.

V2

ISSUE DATE

2022-08-22

PAGE

1 OF 22

FN1010D022A


Product Specification Rev.V2


BUYER	
SUPPLIER	FANNAL Electronics CO., LTD
FG-Code	FN1010D022A

☐ Preliminary Specification☒ Approval Specification

ITEM	BUYER SIGNATURE	DATE
_____	_____	_____
_____	_____	_____
_____	_____	_____


ITEM	SUPPLIER SIGNATURE	DATE
Prepare	<u> DONG </u>	<u>2022-08-22</u>
Reviewed	<u> Steven </u>	<u>2022-08-22</u>
Approved	<u> JACK </u>	<u>2022-08-22</u>

PRODUCT GROUP		REV	ISSUE DATE		
TFT- LCM PRODUCT		V2	2022-8-22		
SPEC. NUMBER AM-1010022A		SPEC . TITLE FN1010D022A Product Specification			PAGE 2 OF 22
REVISION HISTORY					
REV.	Page	DESCRIPTION OF CHANGES		DATE	PREPARED
V0		Upgrade the product model to FN1010D022A based on FN1010D013C V2 Backlight input voltage=5V LCM brightness=500cd		2022-7-13	JACK
V1		Improve Color Coordinate data		2022-7-21	JACK
V2	P6,P8	Before	After	2022-8-22	DONG
		Connector:MSCKT2407P30	Connector: MSAKT2407P30		

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification		PAGE 3 OF 22

Contents

No.	Items	Page
1.0	General Description	4
2.0	Mechanical Drawing	5
3.0	Absolute Maximum Ratings	7
4.0	Electrical Specifications	7
5.0	Interface Description	8
6.0	Optical Specifications	12
7.0	Reliability Test	14
8.0	Precautions	15
9.0	Packing Information	19
10.0	Visual Inspection Criteria For All Customers	20

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification		PAGE 4 OF 22

1.0 General Description /一般说明

1.1 Application /应用


- ☒ Industrial
- ☐ Automotive
- ☐ Medical
- ☐ Outdoor highlight


1.2 General Specification /通用技术条件

The followings are general specifications at the FN1010D022A.

Parameter	Specification	Unit
LCD size	10.1inch(Diagonal)	
Number Of Pixels	1280(H)×800(V)	pixels
Pixel Pitch	0.0565(H)×RGB×0.1695(V)	mm
Active Area	216.96(H)×135.6(V)	mm
Pixel Arrangement	Pixels RGB stripe arrangement	
Display Mode	Normally Black	
Viewing Direction	ALL	o'clock
Module Size	229.46(W)×149.1(H)×4.75(D) (D=9.75MAX, Contains the PCBA)	mm
Display Colors	16.7M	colors
Interface	LVDS	
Surface Treatment	HC	
Luminance	500(Typ.)	cd/m ²
Driver IC	/	

2.0 Mechanical Drawing /机械制图

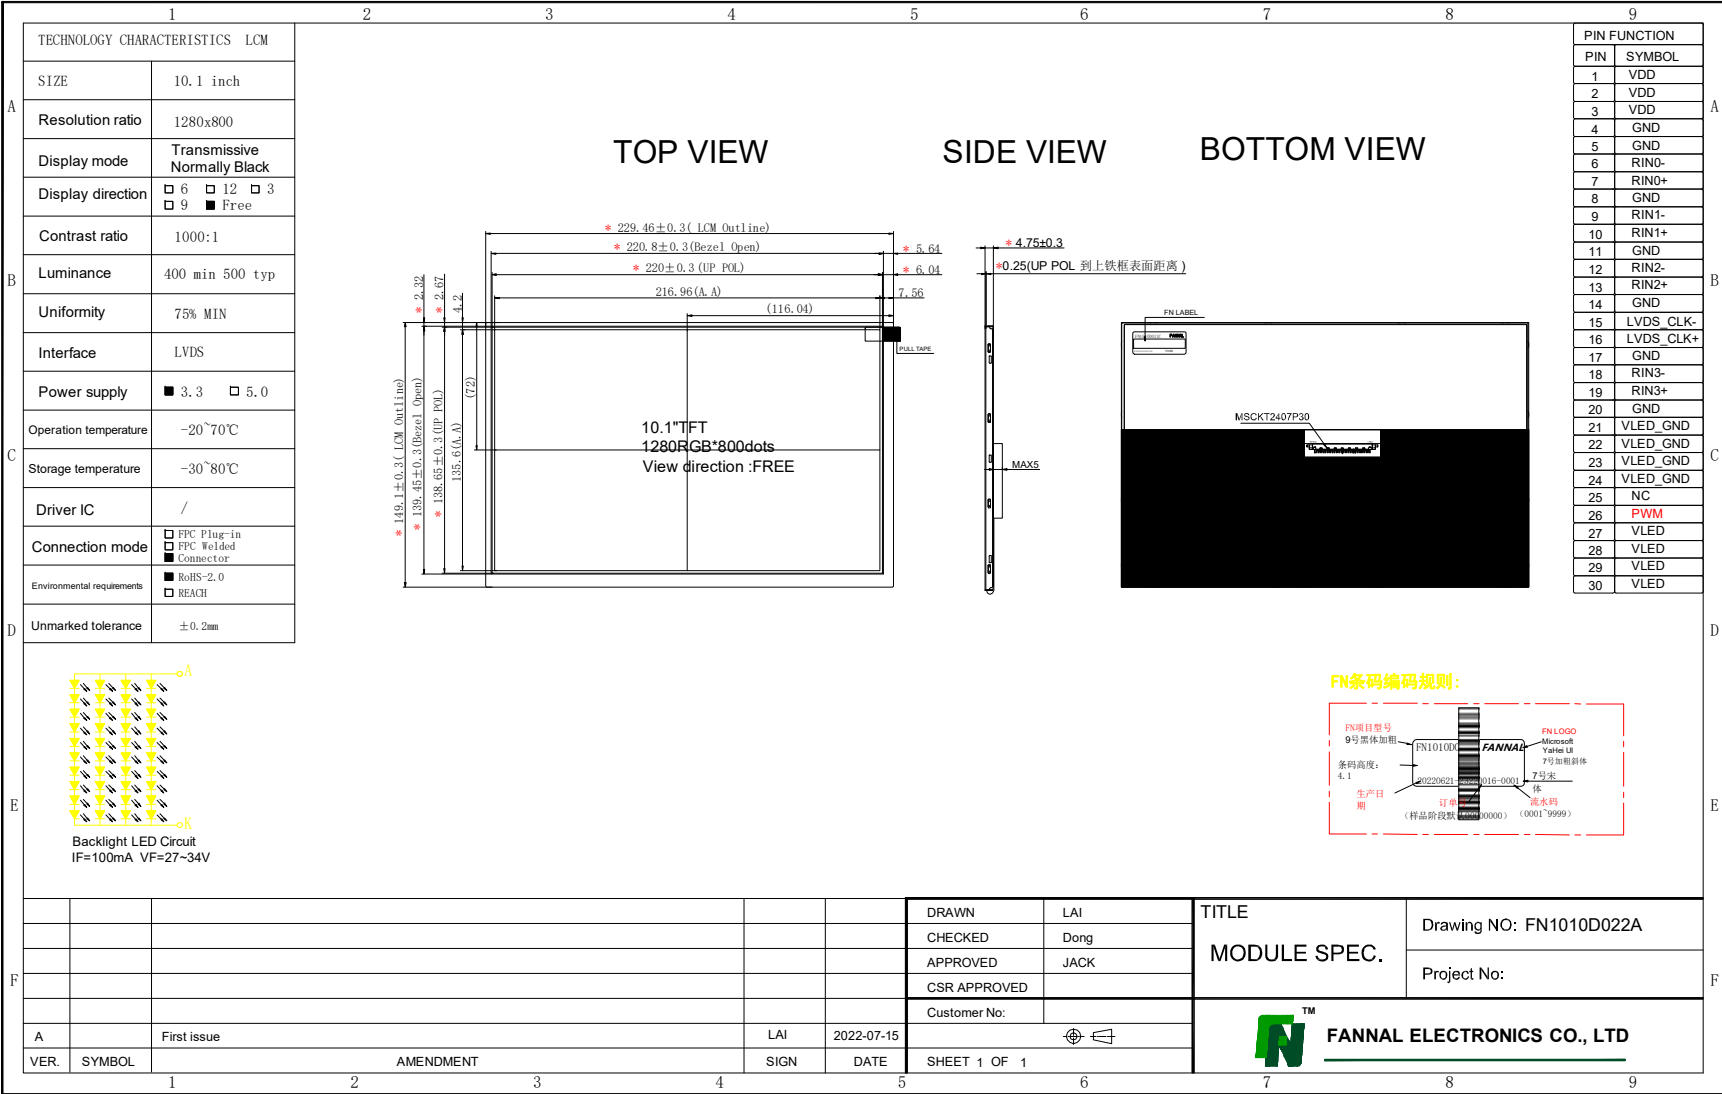

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification		PAGE 6 OF 22

3.0 ABSOLUTE MAXIMUM RATINGS /绝对最大额定值

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit.

[Ta =25±2 °C]


Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Voltage	VDD	VSS-0.3	3.6	V	
Operating Temperature	T _{OP}	-20	+70	°C	
Storage Temperature	T _{ST}	-30	+80	°C	

4.0 ELECTRICAL SPECIFICATIONS/电气规范

4.1 TFT LCM Module

[Ta =25±2 °C]

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power Supply Voltage	VDD	3.0	3.3	3.6	V
Current for Power Supply	IDD	-	190	-	mA
Voltage for Backlight	VLED	-	5.0	-	V
Current for Backlight	ILED	-	600	-	mA
LED_EN		3.0	3.3	18	V
LED Life Time	-	-	50000	-	Hrs


PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 7 OF 22


5.0 Interface Description/接口说明

Connector Name/Designation	Interface Connector/Interface Card
Type Part Number	MSAKT2407P30
Mating Housing Part Number	JAE FI-X30HL

5.1 Pin assignment for LCM module /模组引脚分配

Pin No.	Symbol	I/O	Description
1	VDD	P	Power supply VDD=3.3V TYP
2	VDD	P	Power supply VDD=3.3V TYP
3	VDD	P	Power supply VDD=3.3V TYP
4	GND	P	Ground
5	GND	P	Ground
6	RIN0-	I	LVDS Negative data signal(-)
7	RIN0+	I	LVDS Positive data signal(+)
8	GND	P	Ground
9	RIN1-	I	LVDS Negative data signal(-)
10	RIN1+	I	LVDS Positive data signal(+)
11	GND	P	Ground
12	RIN2-	I	LVDS Negative data signal(-)
13	RIN2+	I	LVDS Positive data signal(+)
14	GND	P	Ground
15	LVDS_CLK-	I	LVDS Negative CLK signal(-)
16	LVDS_CLK+	I	LVDS Positive CLK signal(+)
17	GND	P	Ground
18	RIN3-	I	LVDS Negative data signal(-)
19	RIN3+	I	LVDS Positive data signal(+)
20	GND	P	Ground


PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 8 OF 22
Pin No.	Symbol	I/O	Description	
21	VLED_GND	P	Ground for backlight unit.	
22	VLED_GND	P	Ground for backlight unit.	
23	VLED_GND	P	Ground for backlight unit.	
24	VLED_GND	P	Ground for backlight unit.	
25	NC	-	Non Connection	
26	EN	-	Boost regulator control, for enable control, PWM and digit dimming, VIN=3 V to 18 V, 20KHz,Duty0%-100%	
27	VLED	P	Power supply for backlight unit. VLED=5.0V TYP	
28	VLED	P	Power supply for backlight unit. VLED=5.0V TYP	
29	VLED	P	Power supply for backlight unit. VLED=5.0V TYP	
30	VLED	P	Power supply for backlight unit. VLED=5.0V TYP	

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification		PAGE 9 OF 22

5.2 Interface timing Parameter /接口时序参数


LVDS Timing Parameter

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
DCLK Frequency	Fdclk	66.3	72.4	78.9	MHz
Horizontal display area	Thd	1280			pixel
HSYNC period time	Th	1380	1440	1500	pixel
HSYNC blanking	thbp+ thfp	100	160	220	pixel
Vertical display area	Tvd	800			H
Frequency	fV	55	60	65	Hz
VSYNC period time	Tv	824	838	872	H
VSYNC blanking	Tvbp+ Tvfp	24	38	72	H


PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2022-8-22	

SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification	PAGE 10 OF 22
-----------------------------	--	------------------

5.3 Power Sequence:

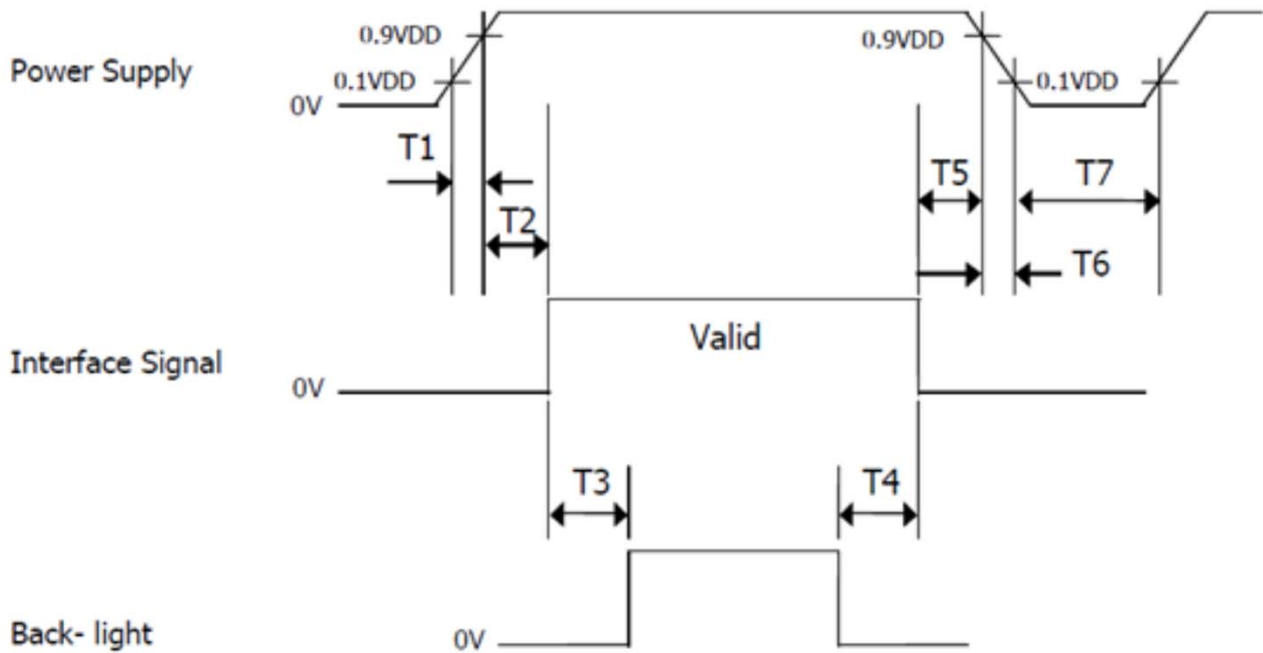

Parameter	Values			Units
	Min	Typ	Max	
T1	0	-	10	ms
T2	0	-	50	ms
T3	200	-	-	ms
T4	500	-	-	ms
T5	0	-	50	ms
T6	0	-	10	ms
T7	500	-	-	ms


PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 11 OF 22


6.0 OPTICAL SPECIFICATIONS /光学规格

Item	Symbol	Condition	Min	Typ.	Max	Unit	Note
Viewing Angle	θ_L	$Cr \geq 10$	70	80	--	deg	Note 1
	θ_R		70	80	--		
	ψ_T		70	80	--		
	ψ_B		70	80	--		
Contrast Ratio	Cr	$\theta = 0^\circ$	-	1000		-	Note 2
Response Time	Tr+Tf	FF=0°	--	35	40	ms	Note 3
Color Coordinate of CIE1931	Wx	$\theta = 0^\circ$	0.251	0.281	0.311	-	Note 4
	Wy		0.259	0.289	0.319		
	Rx		0.569	0.599	0.629		
	Ry		0.311	0.341	0.371		
	Gx		0.281	0.311	0.341		
	Gy		0.523	0.553	0.583		
	Bx		0.123	0.153	0.183		
	By		0.070	0.100	0.130		
Uniformity	U		75	80		%	Note 5
Luminance	L		400	500	-	cd/m ²	Note 6

Note 1: The definition of Viewing Angle

Refer to the graph below marked by θ and ϕ .

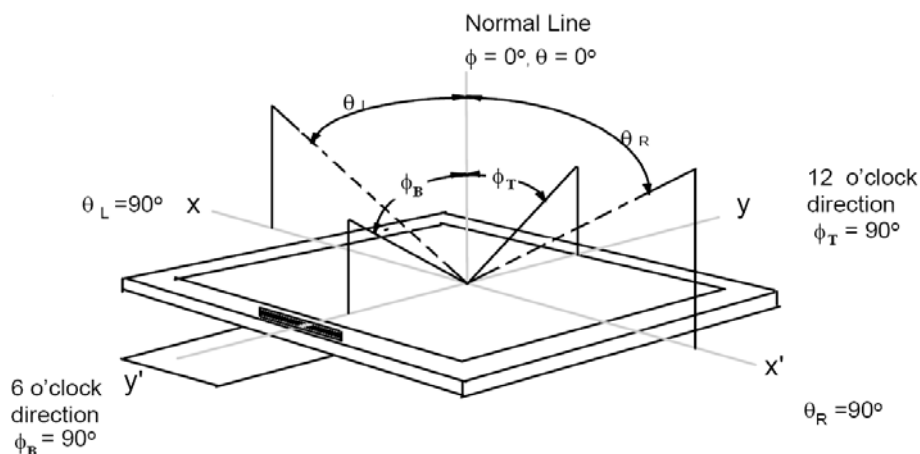

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 12 OF 22

Note2:The definition of Contrast Ratio

$$\text{Contrast Ratio(CR)} = \frac{\text{Luminance When LCD is at "White" state}}{\text{Luminance When LCD is at "Black" state}}$$

(Contrast Ratio is measured in optimum common electrode voltage)

Note3: Definition of Response time.(Test LCD using RD80S or similar equipments):

The output sign also photo detector are measured when the input sign also are changed from "black" to " white "(Voltage falling time)and from " white " to " black " (Voltage rising time), respectively .The response time is defined as the time interval between the 10% and 90% of amplitudes . Refer to figures below.

Note 4: Color Coordinates of CIE 1931

The test condition is at ILED=20mA and measured on the surface of LCD module at 25°C.

Measurement equipment: CS2000 or similar equipments

The Color Coordinate (CIE 1931) is the measurement of the center of the display shown in below figure.

Note 5:Definition of Luminance Uniformity

Active area is divided into 9 measuring areas. Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) = L_{\min} / L_{\max}


L-----Active area length W----- Active area width


L_{\max} : The measured Maximum luminance of all measurement position.

L_{\min} : The measured Minimum luminance of all measurement position.

Note 6: Definition of Luminance:

Measure the luminance of white state at center point.

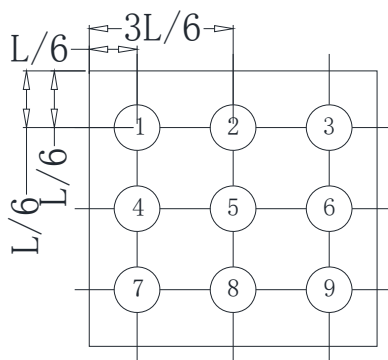



PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification		PAGE 13 OF 22

7.0 RELIABILITY TEST /可靠性测试

The Reliability test items and its conditions are shown in below.

No	Test Items	Conditions
1	High temperature storage	80°C 240hrs
2	Low temperature storage	-30°C 240hrs
3	Low temperature operation	-20°C 240hrs
4	High temperature operation	70°C 240hrs
5	High temperature & humidity (Storage)	60°C 90%RH 240hrs
6	Thermal Shock	-30°C~80°C 1hr/cycle 30cycle

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 14 OF 22
<ul style="list-style-type: none">• 8.0 Precautions /注意事项• Please pay attention to the followings when you use this TFT LCD Panel.• 8.1 Mounting Precautions /安装注意事项• (1) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.• (2) You must mount a module using specified mounting holes (Details refer to the drawings).• (3) Please make sure to avoid external forces applied to the Source PCB or FPC and D-IC during the process of handling or assembling. If not, It causes panel damage or malfunction.• (4) Note that polarizers are very fragile and could be easily damaged. Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.• (5) Do not pull or fold the source D-IC which connect the source PCB or FPC and the panel.• Do not pull or fold the LED wire.• (6) After removing the protective film, when the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with alcohol or purified water.• Do not strong polar solvent because they cause chemical damage to the polarizer.• (7) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.• (8) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.• (9) Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass may be broken.• (10) Do not disassemble the module.• (11) To determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.• (12) If the customer's set presses the main parts of the LCD, the LCD may show the abnormal display. But this phenomenon does not mean the malfunction of the LCD and should be pressed by the way of mutual agreement.• (13) Do not drop water or any chemicals onto the LCD's surface.				

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification		PAGE 15 OF 22

8.2 Operating Precautions /操作注意事项

- (1) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (2) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (3) The electrochemical reaction caused by DC voltage will lead to LCD degradation, so DC drive should be avoided.
- (4) The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.
- (5) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.
- (6) Design the length of cable to connect between the connector for back-light and the converter as short as possible and the shorter cable shall be connected directly.

The longer cable between that of back-light and that of converter may cause the luminance of LED to lower and need a higher startup voltage(Vs).


- (7) Connectors are precise devices for connecting PCB and transmitting electrical signals. Operators should insert and unplug MDL in parallel when assembling MDL.
- (8) Do not connect or disconnect the cable to/ from the module at the "Power On" condition.
- (9) When the module is operating, do not lose CLK, ENAB signals. If any one these signals is lost, the LCD panel would be damaged.
- (10) Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (11) Do not re-adjust variable resistor or switch etc.
- (12) For the Q/Single/OC Product, If the LED designed side view, LED bar should be putted in the Long/short side ; Otherwise, its reliability and function may not be guaranteed.

注:

- ①(1)涉及到Pol相关条目适用于OC/MDL出货产品,
- ②(6)(7)涉及到connector相关适用于OC/MDL出货产品
- ③ (12) 涉及到客户进行BLU设计, LED Bar位置需要避开GOA位置;

8.3 Electrostatic Discharge Control /静电放电控制

- (1) Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly. Keep products as far away from static electricity as possible.
- (2) Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.

PRODUCT GROUP	REV	ISSUE DATE	
TFT- LCM PRODUCT	V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification		PAGE 16 OF 22


8.4 Precautions for Strong Light Exposure /强光照射注意事项

It is not allowed to store or run directly in strong light or in high temperature and humidity for a long time; Strong light exposure causes degradation of polarizer and color filter.

8.5 Storage Precautions /存储注意事项

When storing modules as spares for a long time, the following precautions are necessary.

- (1) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.
Temperature : 5 ~ 40 °C
- (2) Humidity : 35 ~ 75 %RH
- (3) Period : 6 months
- (4) Control of ventilation and temperature is necessary.
- (5) Please make sure to protect the product from strong light exposure, water or moisture.
Be careful for condensation.
- (6) Store in a polyethylene bag with sealed so as not to enter fresh air outside in it.
- (7) Do not store the LCD near organic solvents or corrosive gasses.
- (8) Please keep the Modules/OC/FOG at a circumstance shown below Fig.





8.6 Precautions for Protection Film /保护膜注意事项


- (1) Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- (2) In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

8.7 Appropriate Condition for Display /适当的显示条件

- (1) Normal operating condition
 - Temperature: 0 ~ 40°C
 - Operating Ambient Humidity : 10 ~ 90 %
 - Display pattern: dynamic pattern (Real display)
 - Suitable operating time: under 12 hours a day.
- (2) Special operating condition
If the product will be used in extreme conditions such as high temperature, humidity, display patterns or 7*24hrs operation time etc., It is strongly recommended to contact us for Application engineering advice. Otherwise, its reliability and function may not be guaranteed.
- (3) Black image or moving image is strongly recommended as a screen save.

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER	SPEC. TITLE			PAGE
AM-1010022A	FN1010D022A Product Specification			17 OF 22
<ul style="list-style-type: none">• (4) Lifetime in this spec. is guaranteed only when commercial display is used according to operating usages.• (5) Please contact us in advance when you display the same pattern for a long time.• (6) If the Module keeps displaying the same pattern for a long period of time, the image may be “sticked“ or “turn off” to the screen. To avoid image sticking, it is recommended to use a screen saver.• (7) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.• (8) Dew drop atmosphere should be avoided.• (9) The storage room should be equipped with a good ventilation facility and avoid to expose to corrosive gas , which has a temperature controlling system.• (10) The LCD should be avoided to expose to corrosive gas for long time, ,the LCD may be affected by the gas as SO2 ,H2S etc.• (11) When expose to drastic fluctuation of temperature (hot to cold or cold to hot) ,the LCD may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.• (12) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation				
8.8 Others /其他				
A. LC Leak /液晶泄露				
<ul style="list-style-type: none">• If the liquid crystal material leaks from the panel, it is recommended to wash the LC with acetone or ethanol and then burn it.• In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.• If LC in mouth, mouth need to be washed, drink plenty of water to induce vomiting and follow medical advice.• If LC touch eyes, eyes need to be washed with running water at least 15 minutes.				
B. Rework /返工				
<ul style="list-style-type: none">• When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.				
C. In order to prevent potential problems, flicker should be adjusted by optimizing the Vcom value in customer LCM Line (适用于Q/Single/OC出货产品)				

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 18 OF 22
9.0 PACKING INFORMATION(产品形态: LCM) TBD				

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 19 OF 22

10.0 VISUAL INSPECTION CRITERIA FOR ALL CUSTMERS /所有客户的目视检查标准

10.1 Sampling Method /抽样方法

Unless otherwise agreed upon in writing, the sampling inseption shall be applied to t
he Customers incoming inspection.

10.1.1 Lot size : 1 pallet per same model

10.1.2 Sampling type : Random sampling

10.1.3 Inspection level : II

10.1.4 Sampling table : MIL-STD-105E

10.2 Inspection Environment /检验环境

10.2.1 Ambient conditions

a. Ambient Temperature:25±3℃

b. Relative Humidity:65±20%RH

c. Ambient Illumination:300-700LUX(Normal:500LUX)

10.2.2 Viewing Distance

The distance between the LCM and the inspector's eyes shall be at least 30cm-50cm

10.2.3 Viewing Angle


performing in front of the panel

[Vertical] : ±25degree

[Horizontal] : ±40degree

10.2.4 Inspection Area:

Display Area(Active Area)

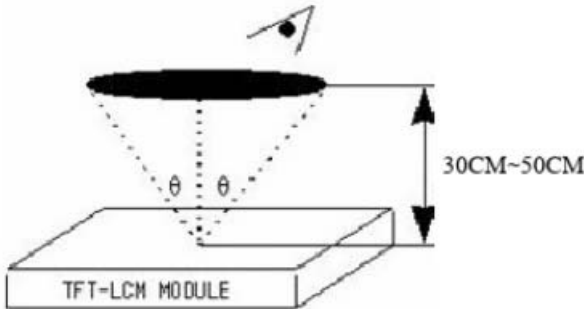

10.3 Definitions /定义

10.3.1 Dark / Bright Spots

Points on display which appear dark/bright and usually result form the contamination.
These defects do not vary in size or intensity(contrast)when contrast is varied.

10.3.2 Dark / Bright Lines

Lines on display which appear dark/bright and usually result from the contamination.

10.3.3 Polarizer Scratch


Lines on display which are seen across a darker background and do not vary in size.


10.3.4 Polarizer Dent


White spots on display which appear againse a darker background and do not vary in size.

103.5 Bright Dot Defects

Dots(sub-pixels)on display which appear bright in the display area and visible throug
h the 5%ND filter at Black Pattern.

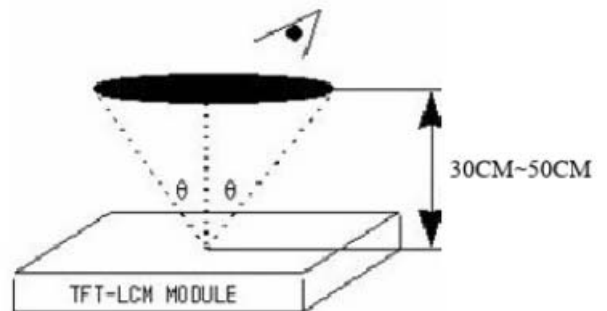

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 20 OF 22
<p>10.3.6 Dark Dot Defects Dots(sub-pixels)on display which appear dark in the display area at R.G.B Color Pattern.</p> <p>10.3.7 Line Defects All line defects on display which appear bright/dark such as vertical, horizontal, or cross lines.</p> <p>10.3.8 Mura Mura on display which appears darker/brighter against background brightness on parts of display area.</p> <p>10.3.9 BM Defects Bright(white)Points on display which are off BM(Black Matrix).</p> <p>10.3.10 Visual Inspection Inspection for LCM when the unit turns on.</p> <p>10.3.11 Appearance Inspection External inspection for LCM when the unit turns off.</p> <p>10.3.12 Other Defects which cannot be classified into the above defect definitions.</p> <p>Note 1: Bright& Dark dots are not smaller than a sub-pixel(Dots smaller than a sub-pixel are not counted as defect dots)</p> <p>10.4 Inspection Criteria /检验标准</p> <p>Refer to 《TFT LCM general inspection standard》</p> <p>10.5 Verification /验证 The supplier can verify the defective LCMs to segregate the responsibilities at customer's facility or can request the Customer to ship the defective LCMs to assigned place for verification This verification result shall be agreed mutually by the Customer and Supplier. This result can be corrected/changed after detail failure analysis at Supplier's facilities.</p> <p>10.6 Supplier Induced Defects /供应商引起的缺陷 All of the Supplier induced defective LCMs shall be returned to the Supplier for repair or replacement. Before return the defective LCMs, the Customer needs Supplier's confirmation with RMA Number. All of the returned LCMs shall be returned to the Customer within agreed time period.</p>				

PRODUCT GROUP		REV	ISSUE DATE	
TFT- LCM PRODUCT		V2	2022-8-22	
SPEC. NUMBER AM-1010022A	SPEC. TITLE FN1010D022A Product Specification			PAGE 21 OF 22
<p>10.7 Customer Induced Defects /顾客引起的缺陷 The Customer can return the customer induced defective LCMs to the Supplier for repair. The repair cost for Customer induced defective LCMs shall be agreed with both parties, Customer and Supplier.</p> <p>10.8 Warranty Period /质量保证期 In-warranty period is Eighteen(18)Months from manufacturing month of LCM Note : a. Eighteen months are composed of twelfth months in-warranty period and sixth months distribution period b. The manufacturing Month is on the LCMs as Supplier's serial No.</p> <p>10.9 Repair Warranty /维修保证书 Repair warranty is Twelve(12)Months from repaired month for repaired LCMs Note : a. The Label for repair will be added after repairing.</p> <p>10.10 Warranty avoidance /避免担保 The warranty will be avoided in cases of below: a. When the warranty period is expired. b. The Customer induced defective LCMs. c. When the LCMs were repaired by 3rd party without Supplier's approval. d. When the LCMs were treated like Disassemble and Rework by the Customer and/or Customer's representatives without Supplier's approval.</p> <p>10.11 Others /其他 If any problems arise with the LCMs supplied by supplier, the customer and supplier will cooperate and make efforts to solve it with mutual confidence and respect</p>				