



Rev.	Description	Date
A001	This initial drawing	2020.11.08
A002	增加IPC#数据指示位置, 修改管脚外形尺寸端子号格式	2020.11.08
A003	更改焊脚焊盘尺寸规格, 增加管脚指示位置	2020.11.20
A004	变更ICT# IPC#数据格式	2020.11.20
A	增加ICT#分线符号进行识别	2021.04.12

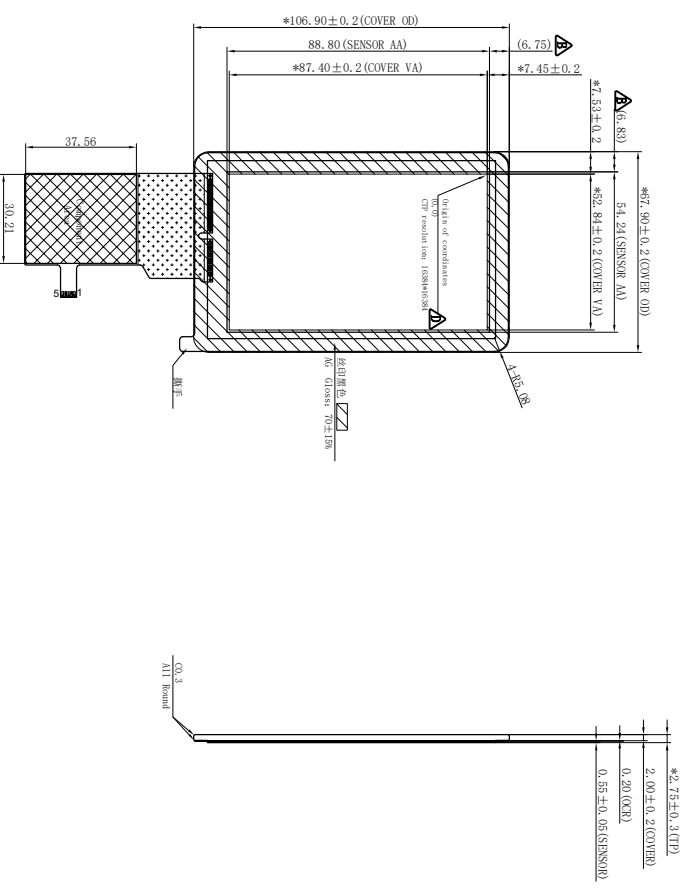


Front view

Side view

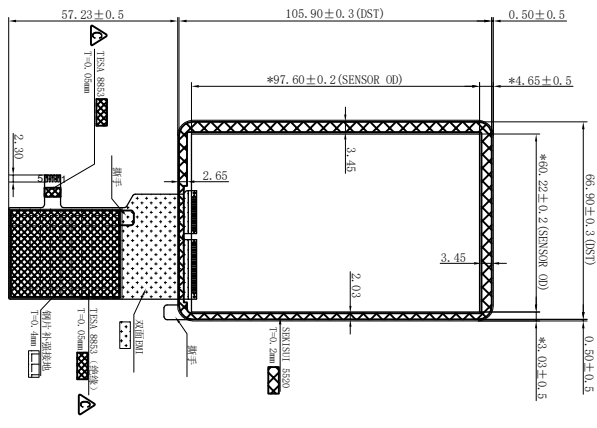

Back view



A-A 4:1

TECHNOLOGY CHARACTERISTICS CTR/LCM	
Property	Requirement
Structure	6+6
Bonding Type	EX20002
Touch IC	2 (电容触控)
No. of Touch	2 (电容触控)
Cover Lens Thickness	2.0mm (玻璃)
ITO glass Thickness	0.55mm
Surface Abrasives	≥7R
Light Transmittance	80% Min
Operating Temperature	-20 70°C
Storage Temperature	-30 90°C
TP-ILM Brightness	cd/m² (min.)
Channel	cd/m² (typ.)
PC material	
Packaging	

Important dimensions:  
General tolerance: ±0.2  
Dimensions in angular: ±1°

Pin No.	Pin Name
1	TS 100
2	TS 1M1
3	TS SCL
4	TS SDA
5	GND

<b>FARNAL ELECTRONICS CO., LTD</b>		<b>TITLE</b>	
<b>Touch Panel</b>		<b>PN0408GRCX004</b>	
3rd Angle	Drawing	Author/2021.04.12	Part No.
Check	Check	Yan/2021.04.12	Project Name
Approve	Approve	Hong/2021.04.12	Customer No
Unit		CR Approve	Revision
mm			A
Scale			Sheet
1:1			1 of 1