




Rev.	Description	Date
A001	The initial drawing	2020.12.31
A002	修正客户料号	2020.12.30
A	客户确认, 跟踪修改	2020.12.30

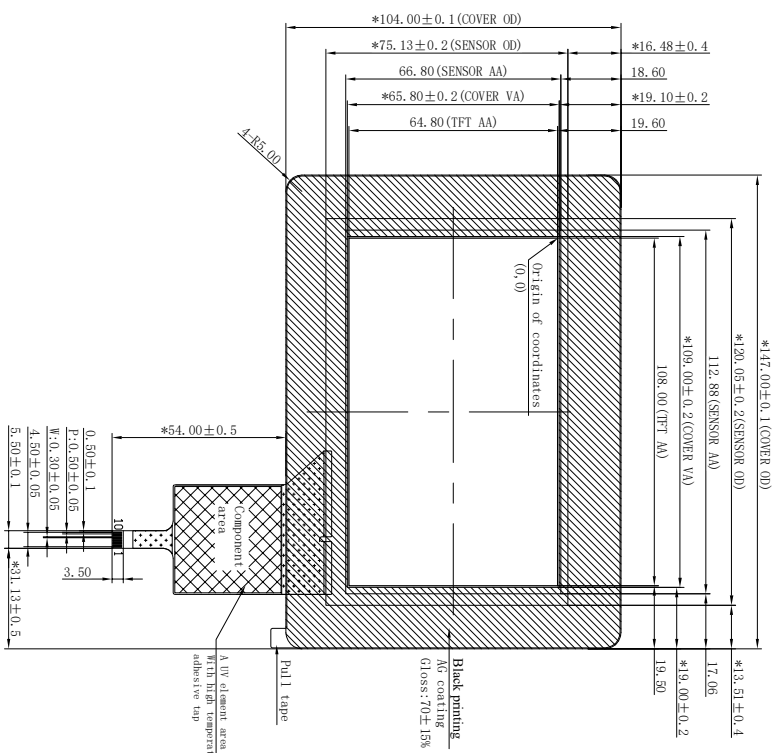

Front view

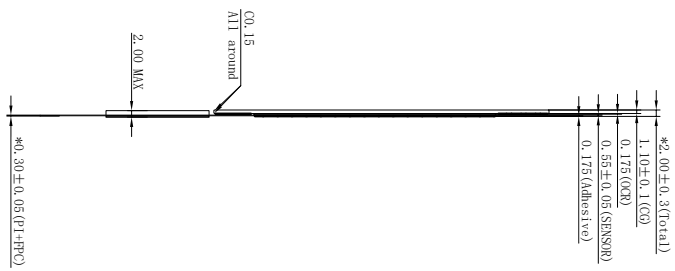

Side view

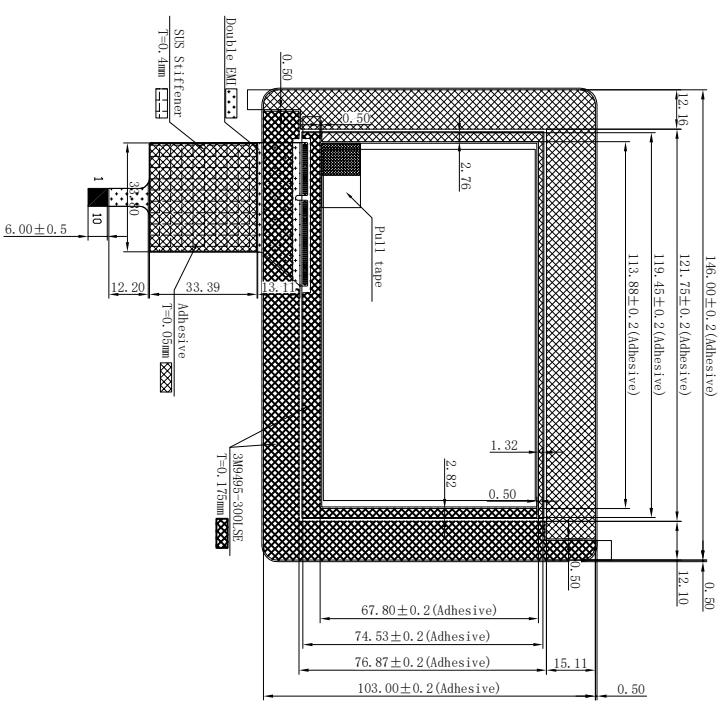

Back view

TECHNOLOGY CHARACTERISTICS C/P	
Property	Requirement
Structure	G+G
Boarding Type	-
Touch IC	1128311
No. of Touch	10
Cover Glass Thickness	1.1mm (Standard requirement)
I/O Glass Thickness	0.55mm
Surface Hardness	≥7H
Light Transmittance	86% Min
Operating Temperature	-20~70
Storage Temperature	-30~90°C
PC material	
Packaging	

Important dimensions: \*  
General tolerance: ±0.3,  
Dimensions in angular: ±1°.

PIN NO.	SYMBOL
1	USB VSS
2	USB VDD 5V
3	USB D+
4	USB D-
5	VSS
6	SDA
7	SCL
8	RST
9	INT
10	VDDT 3.3V

		<b>TITLE</b> Touch Panel	
3rd Angle	Drawing	Part NO.	PN050RGKX022A
Check	Yan/Z020.12.30	Project Name	TTA5643
Approve	Regen/Z020.12.30	Customer NO	
Unit	mm	Revision	A
CSR Approve		Scale	1:1
		Sheet	1 of 1