


Rev.	Description	Date
A001	The initial drawing	2020.10.17

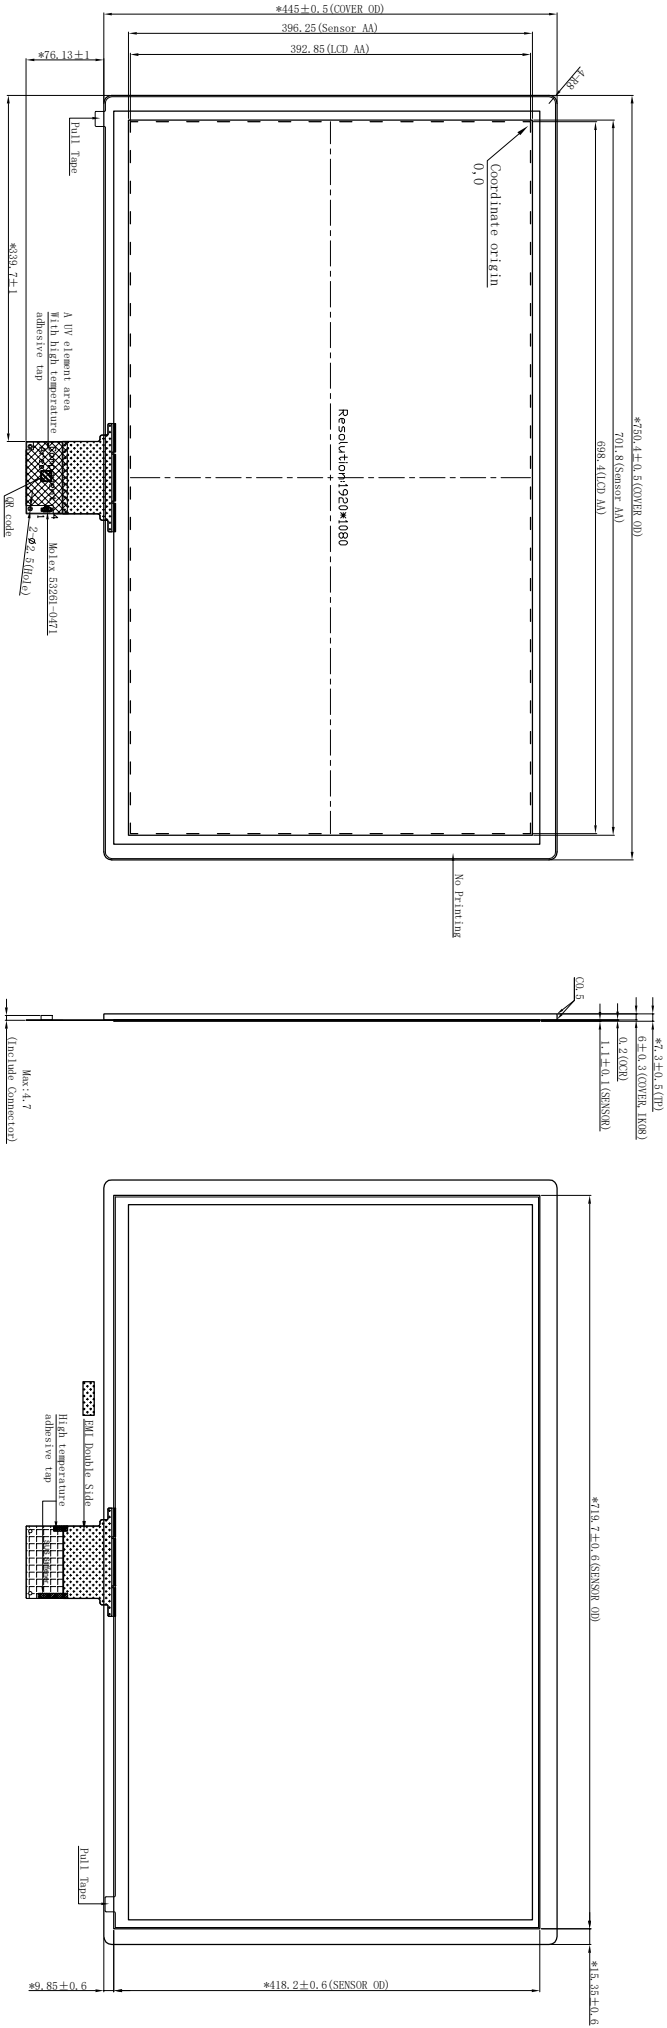

Front view

Side view

Back view

USB PIN DEFINITION			
Pin No.	Definition		
1	VCC 5V		
2	D-		
3	D+		
4	GND		

TECHNOLOGY CHARACTERISTICS CTP/LCM	
Property	Requirement
Structure	G+G
Bonding Type	/
Touch IC	mt2952TD
No. of Touch	5
Cover Glass Thickness	6.0mm (physical thickness)
ITO glass Thickness	1.1mm
Surface Hardness	≥6H
Light Transmittance	82% Min
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C
TP+LCM Brightness	cd/m ² (min.) / cd/m ² (typ)

Important dimensions: *.
General tolerance: ±0.5.
Dimensions in angular: ±1°.

Unless specifically stated otherwise, inspection will be carried out in accordance with Farnal's FN-WI-PZ-56-AZ TPE&TPM Appearance Inspection Specification and later versions.

FARNAL ELECTRONICS CO., LTD		TITLE	
Touch Panel		Part NO.	PN320PCKCKX007A

3rd Angle		Drawing		Part NO.	
Check		Yim/2020.10.17		PN320PCKCKX007A	
Approve		Murphy/2020.10.17		TPM816	
CSR Approve		Roger/2020.10.17		Customer NO	
Unit		mm		Revision	
				A001	
				Scale 1:1	
				Sheet 1 of 1	